


环保物料

Specifications:

Voltage Rating : 250V AC/DC
Current Rating : 8A AC,DC
Withstand Voltage : 1500V AC/minute
Contact Resistance : 15mΩ(MAX.)
Insulation Resistance : 1000V DC/1000MΩ(MIN.)
Temperature Range : -55°C~+105°C

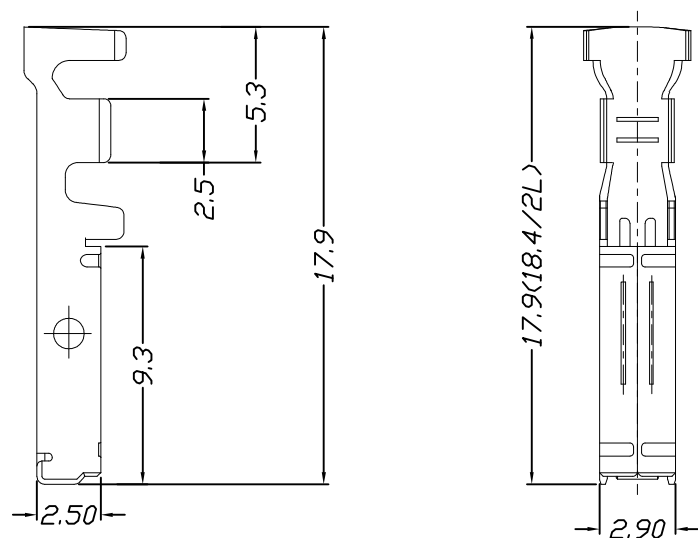

Part No	Wire Range	Insulation O. D.	Material	Finish
43812T 0P-**-#24	AWG#28	0.8mm-1.4mm (1.4mm max)	Phosphor Bronze	Au or Sn
43812T 1P-**-#20	AWG#24	1.2mm-2.6mm (2.6mm max)	Phosphor Bronze	Au or Sn
43812T 2P-**-#16	AWG#20	1.8mm-2.8mm (2.8mm max)	Phosphor Bronze	Au or Sn
43812T 3P-**-#14	AWG#16	2.4mm-3.4mm (3.4mm max)	Phosphor Bronze	Au or Sn

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 康 导 新 能 源 网址: www.dgoonne.com 电话: 0769-85337633 邮箱: 2850175988@qq.com 传真: 0769-85392827	PART. NO: 43812T*P-**	
				LINEAR	ANGLES	APPROVED					
				0.0±0.35	X° REF±6°						
A0	新图面发行	2018.7.28	UNIT: MM	0.00±0.25	X° ±3°	DESIGNER				TITLE:	DWG. NO: ENDE05
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°	DRAWN	肖坤权	2018.7.28		3.81mm pitch Crimp Terminal	REV: A0