

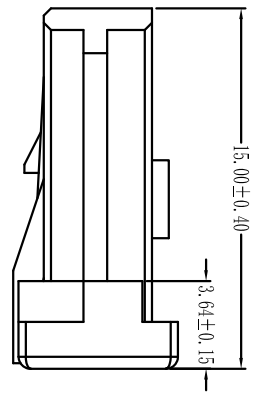


环保物料


12345678

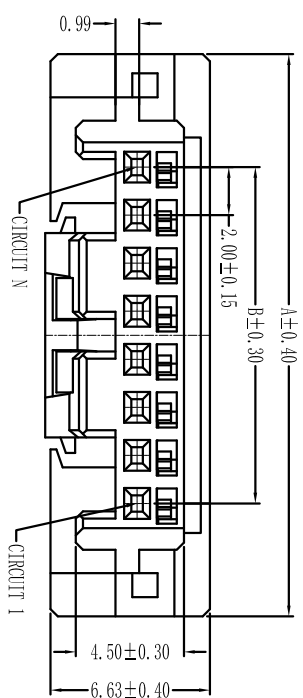




Specifications:
Voltage Rating : 50V AC/DC
Current Rating : 3.0A AC,DC(MIN.)
Withstand Voltage : 500V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 1000MΩ(MIN.)
Temperature Range : -40°C~+125°C

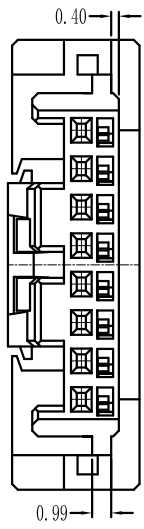

42015H00-1XNPA-X-PBT

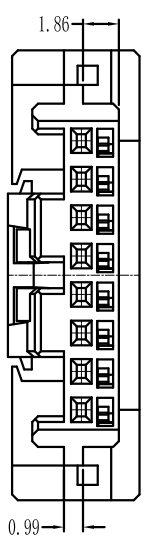

42015H00-1XNPA-Y-PBT

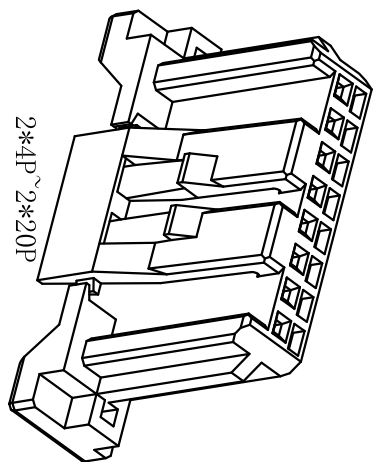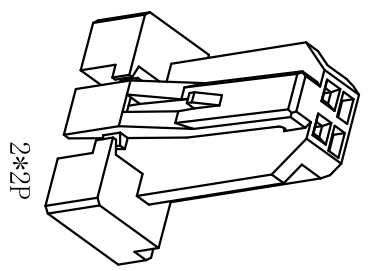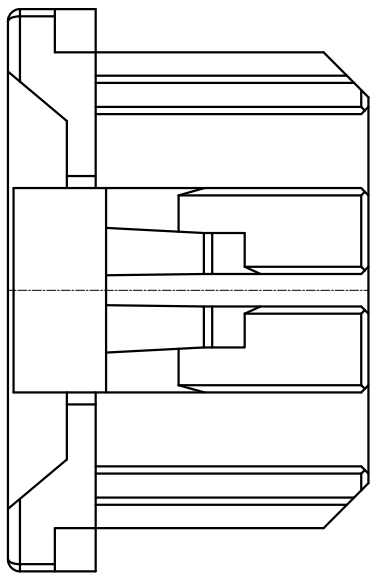

Circuit dimensions		
Part No	B	A
20P	38.00	47.40
18P	34.00	43.40
16P	30.00	39.40
14P	26.00	35.40
12P	22.00	31.40
10P	18.00	27.40
8P	14.00	23.40
6P	10.00	19.40
4P	6.00	15.40
2P		11.40

Part No.	Material	Color
42015H00-1XNPA-*-PBT	PBT	BLACK

GENERAL TOLERANCES		SCALE:	
LINEAR	ANGLES	1:1	
		APPROVED	NAME
0.0±0.25	X° REF±6°	黎腾	2017.06.16
0.00±0.15	X° ±3°	肖坤权	2017.06.16
0.000±0.08	X° X'±2°	旷淇	2017.06.16

**康导新能源**
地址: www.kdpcn.com 电话: 0788-86337833
网址: 285017588@qq.com 传真: 0788-85325257

PART. NO:		PART. NO:	
42015H00-1XNPA-*-PBT		42015H00-1XNPA-*-PBT	
DWG. NO:		ENDE05	
REV:	A0	SHEET:	1/1

SCALE:		TITLE:	
1:1		2.00mm pitch Single Housing	
1	2	3	4
5	6	7	8