

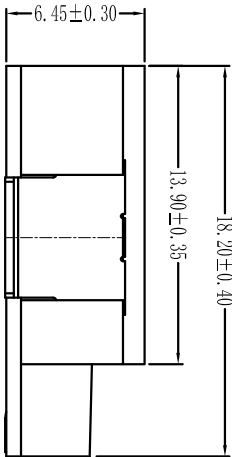
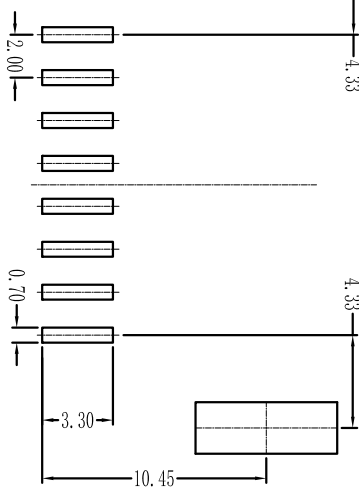

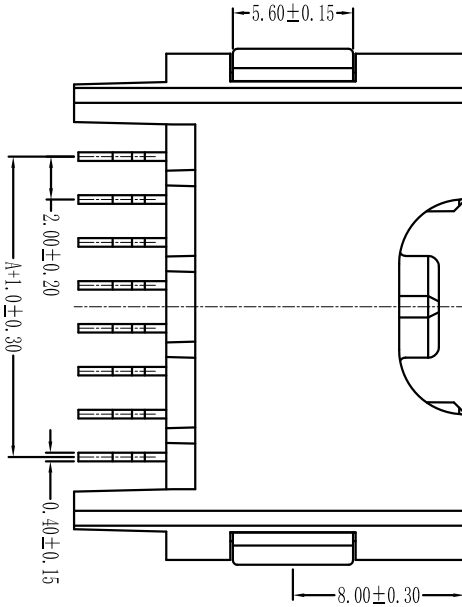
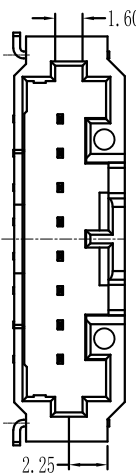


环保物料

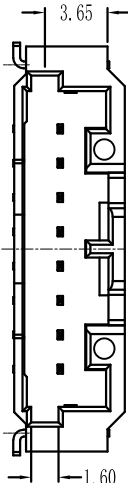

Specifications:
Voltage Rating : 50V AC/DC
Current Rating : 3.0A AC,DC(MIN.)
Withstand Voltage : 500V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 1000MΩ(MIN.)
Temperature Range : -40°C~+125°C

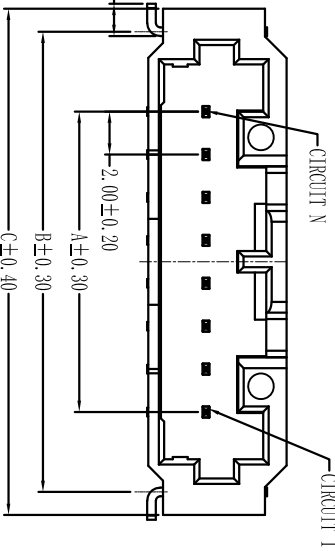

Part No.	Material	Color	PIN Material
42015W90-NPA-A2*-**	PPS,UL94V-0	BLACK	High conductivity copper

Circuits	Dimensions		
Part No	A	B	C
20P	38.00	45.45	47.60
18P	34.00	41.45	43.60
16P	30.00	37.45	39.60
14P	26.00	33.45	35.60
12P	22.00	29.45	31.60
10P	18.00	25.45	27.60
8P	14.00	21.45	23.60
6P	10.00	17.45	19.60
4P	6.00	13.45	15.60
2P		9.45	11.60

GENERAL TOLERANCES		SCALE:		NAME		DATE		TITLE:		PART. NO:	
LINEAR		1:1		黎腾		2017.06.16		2.00mm pitch Single Wafer		42015W90-NPA-A2*-**	
ANGLES		APPROVED		肖坤权		2017.06.16		ENDE05		42015W90-NPA-A2*-**	
X° REF±6°		DESIGNER		旷淇		2017.06.16		SHEET: 1/1			
X° ±3°		DRAWN									
X° X'±2°											



康导新能源
www.kdpcn.com
2850175888@qq.com
0783-65337633
0783-65326227

REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	2017.06.16	2.00mm pitch Single Wafer	REV: A0	SHEET: 1/1
A0	新图面发行	2017.06.16	UNIT: MM	0.00±0.15	X° ±3°	肖坤权	2017.06.16			

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---