

环保物料

Specifications:

Voltage Rating : 125V AC/DC



Current Rating : Refer to table

Withstand Voltage : 800V AC/minute



Contact Resistance : 20mΩ(MAX.)

Insulation Resistance : 1000MΩ(MIN.)

Temperature Range : -55°C~+105°C

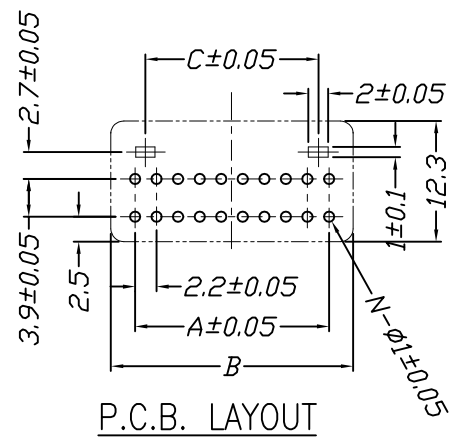

Unit: mm



Part No.	Dimensions		
	A	B	C
2*3P	4.40	9.20	—
2*4P	6.60	11.40	4.40
2*6P	11.00	15.80	8.80
2*10P	19.80	24.60	17.60
2*11P	22.00	26.80	19.80
2*13P	26.40	31.20	24.20
2*15P	30.80	35.60	28.60

Material	Color	PIN Material
PBT,UL94V-0	Gray	Brass

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
				0.0±0.25	X° REF±6°	APPROVED	黎腾	2017.06.16
AO	新图面发行	2017.06.16	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER	肖坤权	2017.06.16
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	旷淇	2017.06.16



PART. NO:
42204W01-2XNP*-A1-***

DWG. NO:
ENDE05

REV: AO SHEET: 1/1

TITLE:
2. 20mm pitch Dual Wafer