

环保物料

Specifications:

Voltage Rating : 125V AC/DC



Current Rating : Refer to table

Withstand Voltage : 800V AC/minute



Contact Resistance : 20mΩ(MAX.)

Insulation Resistance : 1000MΩ(MIN.)

Temperature Range : -55°C~+105°C

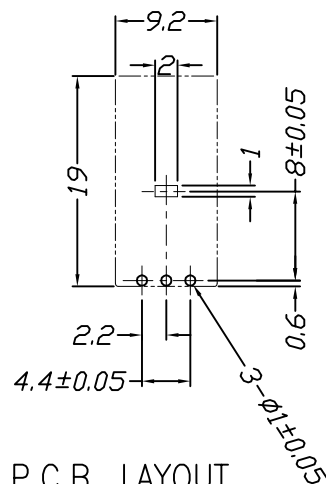

P.C.B. LAYOUT



Unit: mm

Part No.	Dimensions	
	A	B
3P	4.40	9.20
4P	6.60	11.40
6P	11.00	15.80
10P	19.80	24.60
11P	22.00	26.80
13P	26.40	31.20
15P	30.80	35.60

Material	Color	PIN Material
PBT,UL94V-0	Gray	Brass

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
				0.0±0.25	X° REF±6°			
AO	新图面发行	2017.06.16	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER	肖坤权	2017.06.16
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	旷淇	2017.06.16



康导新能源

网址: www.dgconne.com 电话: 0769-853377633
邮箱: 2850175986@qq.com 传真: 0769-853622627

PART. NO:

42204W90-NP*-A1-***

DWG. NO:

ENDE05

REV: AO

SHEET: 1/1

TITLE:
2.20mm pitch Single Wafer