

环保物料

Specifications:

Voltage Rating : 250V AC/DC

Current Rating : 7A AC,DC


Withstand Voltage : 1500V AC/minute

Contact Resistance : 20mΩ(MAX.)






Insulation Resistance : 1000V DC/1000MΩ(MIN.)

Temperature Range : -40°C~+120°C

43501W90-NP*-B3-**-

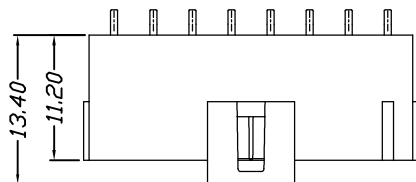

43501W91-NP*-B3-**-

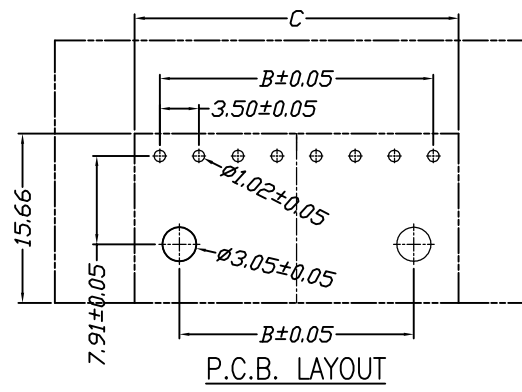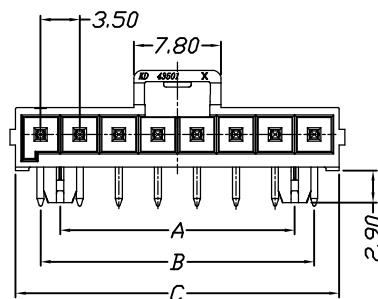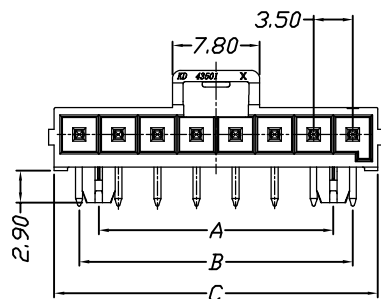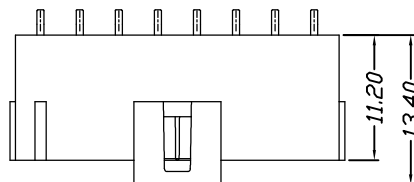

Part No	Dimensions		
	A	B	C
2P	—	3.50	8.00
3P	—	7.00	11.50
4P	7.00	10.50	15.00
5P	10.50	14.00	18.50
6P	14.00	17.50	22.00
7P	17.50	21.00	25.50
8P	21.00	24.50	29.00

Material	Color	PIN	Material
LCP,UL94V-0	Black		Brass

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
AO	新图面发行	2018. 7. 28	UNIT: MM	0. 00±0. 25	X° ±3°	APPROVED		
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000±0. 15	X° X'±2°	DESIGNER	肖坤权	2018. 7. 28



康导新能源

网址: www.dgconne.com 电话: 0769-85337633
邮箱: 2850175988@qq.com 传真: 0769-85392827

TITLE:
3.50mm pitch Single Wafer

PART. NO:		43501W9*-NP*-B3-**-	
DWG. NO:		ENDE05	
REV:	AO	SHEET:	1/1