
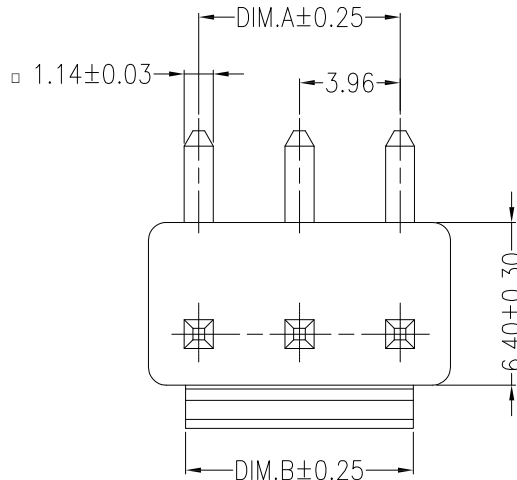
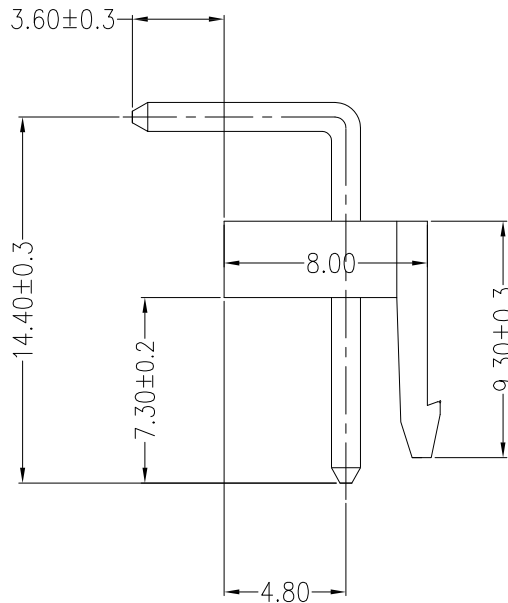


环保物料

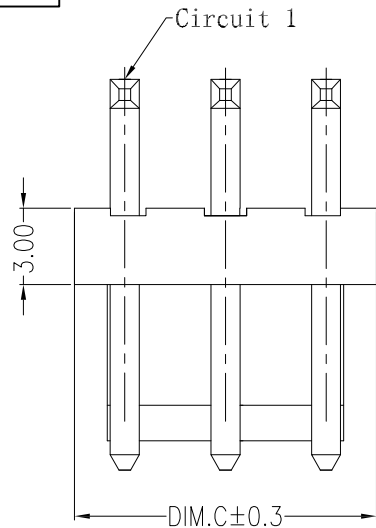

Main Specifications

Poles: 02 to 14

Contact resistance: $\leq 20\text{m}\Omega$

Insulation resistance: $\geq 1000\text{M}\Omega$

Rated voltage: 250V AC DC

Rated current: 7.0A AC DC

Withstand Voltage: 1500V AC/minute

Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Housing: PA66 UL94V-0, White

Contacts: Brass/Sn-plated

Circuits	Dimensions (mm)		
	A	B	C
02	3.96	5.00	7.94
03	7.92	8.96	11.90
04	11.88	12.92	15.82
05	15.84	16.88	19.82
06	19.80	20.84	23.78
07	23.76	24.80	27.74
08	27.72	28.76	31.70
09	31.68	32.76	35.66
10	35.64	36.68	39.62
11	39.60	40.64	43.58
12	43.56	44.60	47.54
13	47.52	48.56	51.80
14	51.48	52.52	55.46

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 康 导 新 能 源 网址: www.dgonne.com 电话: 0769-85337633 邮箱: 2850175988@qq.com 传真: 0769-85392827	PART. NO: 23962AWG		
				LINEAR	ANGLES	APPROVED	黎 腾	2017. 06. 16		DWG. NO:		
				0. 0±0. 35	X° REF±6°							
A0	新图面发行	2017. 06. 16		UNIT: MM	0. 00±0. 25	X° ±3°	DESIGNER	肖坤权		2017. 06. 16	TITLE: 3. 96mmPITCH 90° WAFER DIP TYPE	
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000±0. 15	X° X'±2°	DRAWN	旷 淇	2017. 06. 16		REV: A0		