

环保物料

主要技术参数 Main Specifications

线 数 (Poles): 02 to 16

接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$








绝缘电阻 (Insulation resistance): $\geq 500\text{M}\Omega$

额定电压 (Rated voltage): 150V AC DC

额定电流 (Rated current): 1.0A AC DC

耐 电 压 (Withstand Voltage): 500V AC/minute

温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

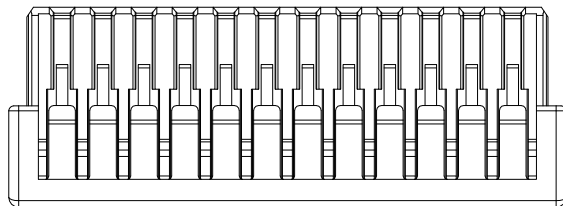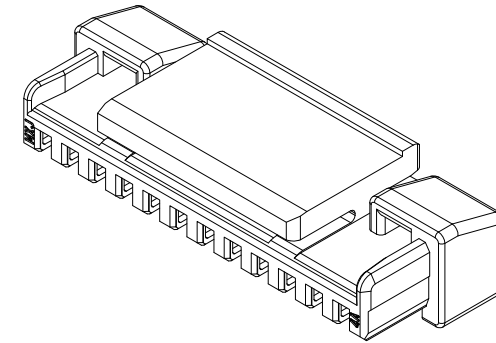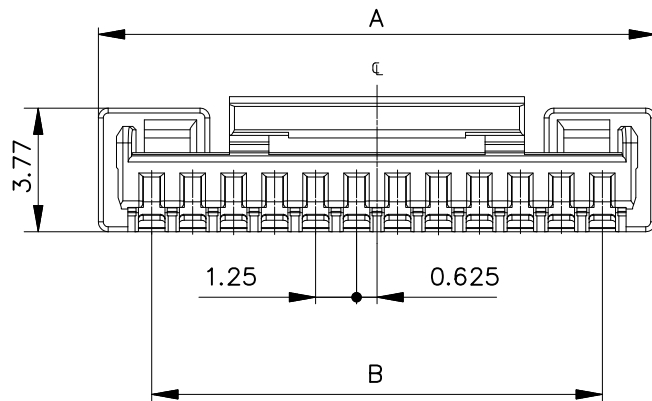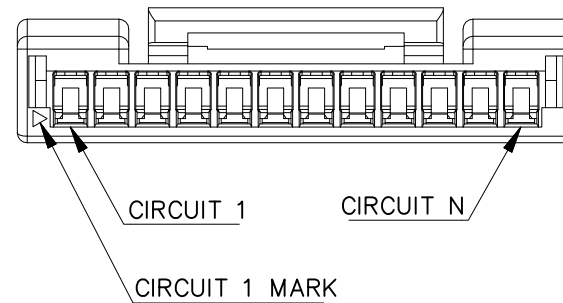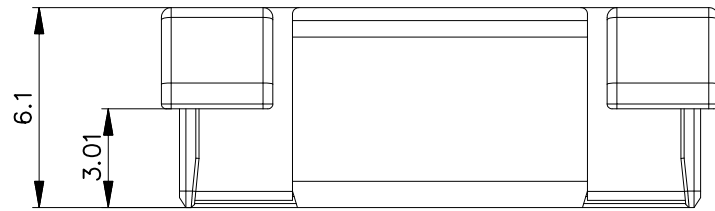

TERMINAL ASSEMBLY DRAWING

Part No	Dimensions	
	B	A
2P	1.25	4.50
3P	2.50	5.75
4P	3.75	7.00
5P	5.00	8.25
6P	6.25	9.50
7P	7.50	10.75
8P	8.75	12.00
9P	10.00	13.25
10P	11.25	14.50
11P	12.50	15.75
12P	13.75	17.00
13P	15.00	18.25
14P	16.25	19.50
15P	17.50	20.75
16P	18.75	22.00

A	HOUSING	2~16 PCS	PBT UL94 V-0	COLOR: WHITE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES	APPROVED	黎腾	2017. 06. 16
				0. 0 $\pm$ 0. 35	X° REF $\pm$ 6°	DESIGNER	肖坤权	2017. 06. 16
A0	新图面发行	2017. 06. 16	UNIT: MM	0. 00 $\pm$ 0. 25	X° $\pm$ 3°	DRAWN	旷淇	2017. 06. 16
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000 $\pm$ 0. 15	X° X' $\pm$ 2°			

 康 导 新 能 源 网址: www.dgoonne.com 电话: 0769-85337633 邮箱: 2850175988@qq.com 传真: 0769-85392827	PART. NO: 21256Y	
	DWG. NO:	
	TITLE: 1. 25mmPITCH HOUSING	
	REV: A0	SHEET: 1/1