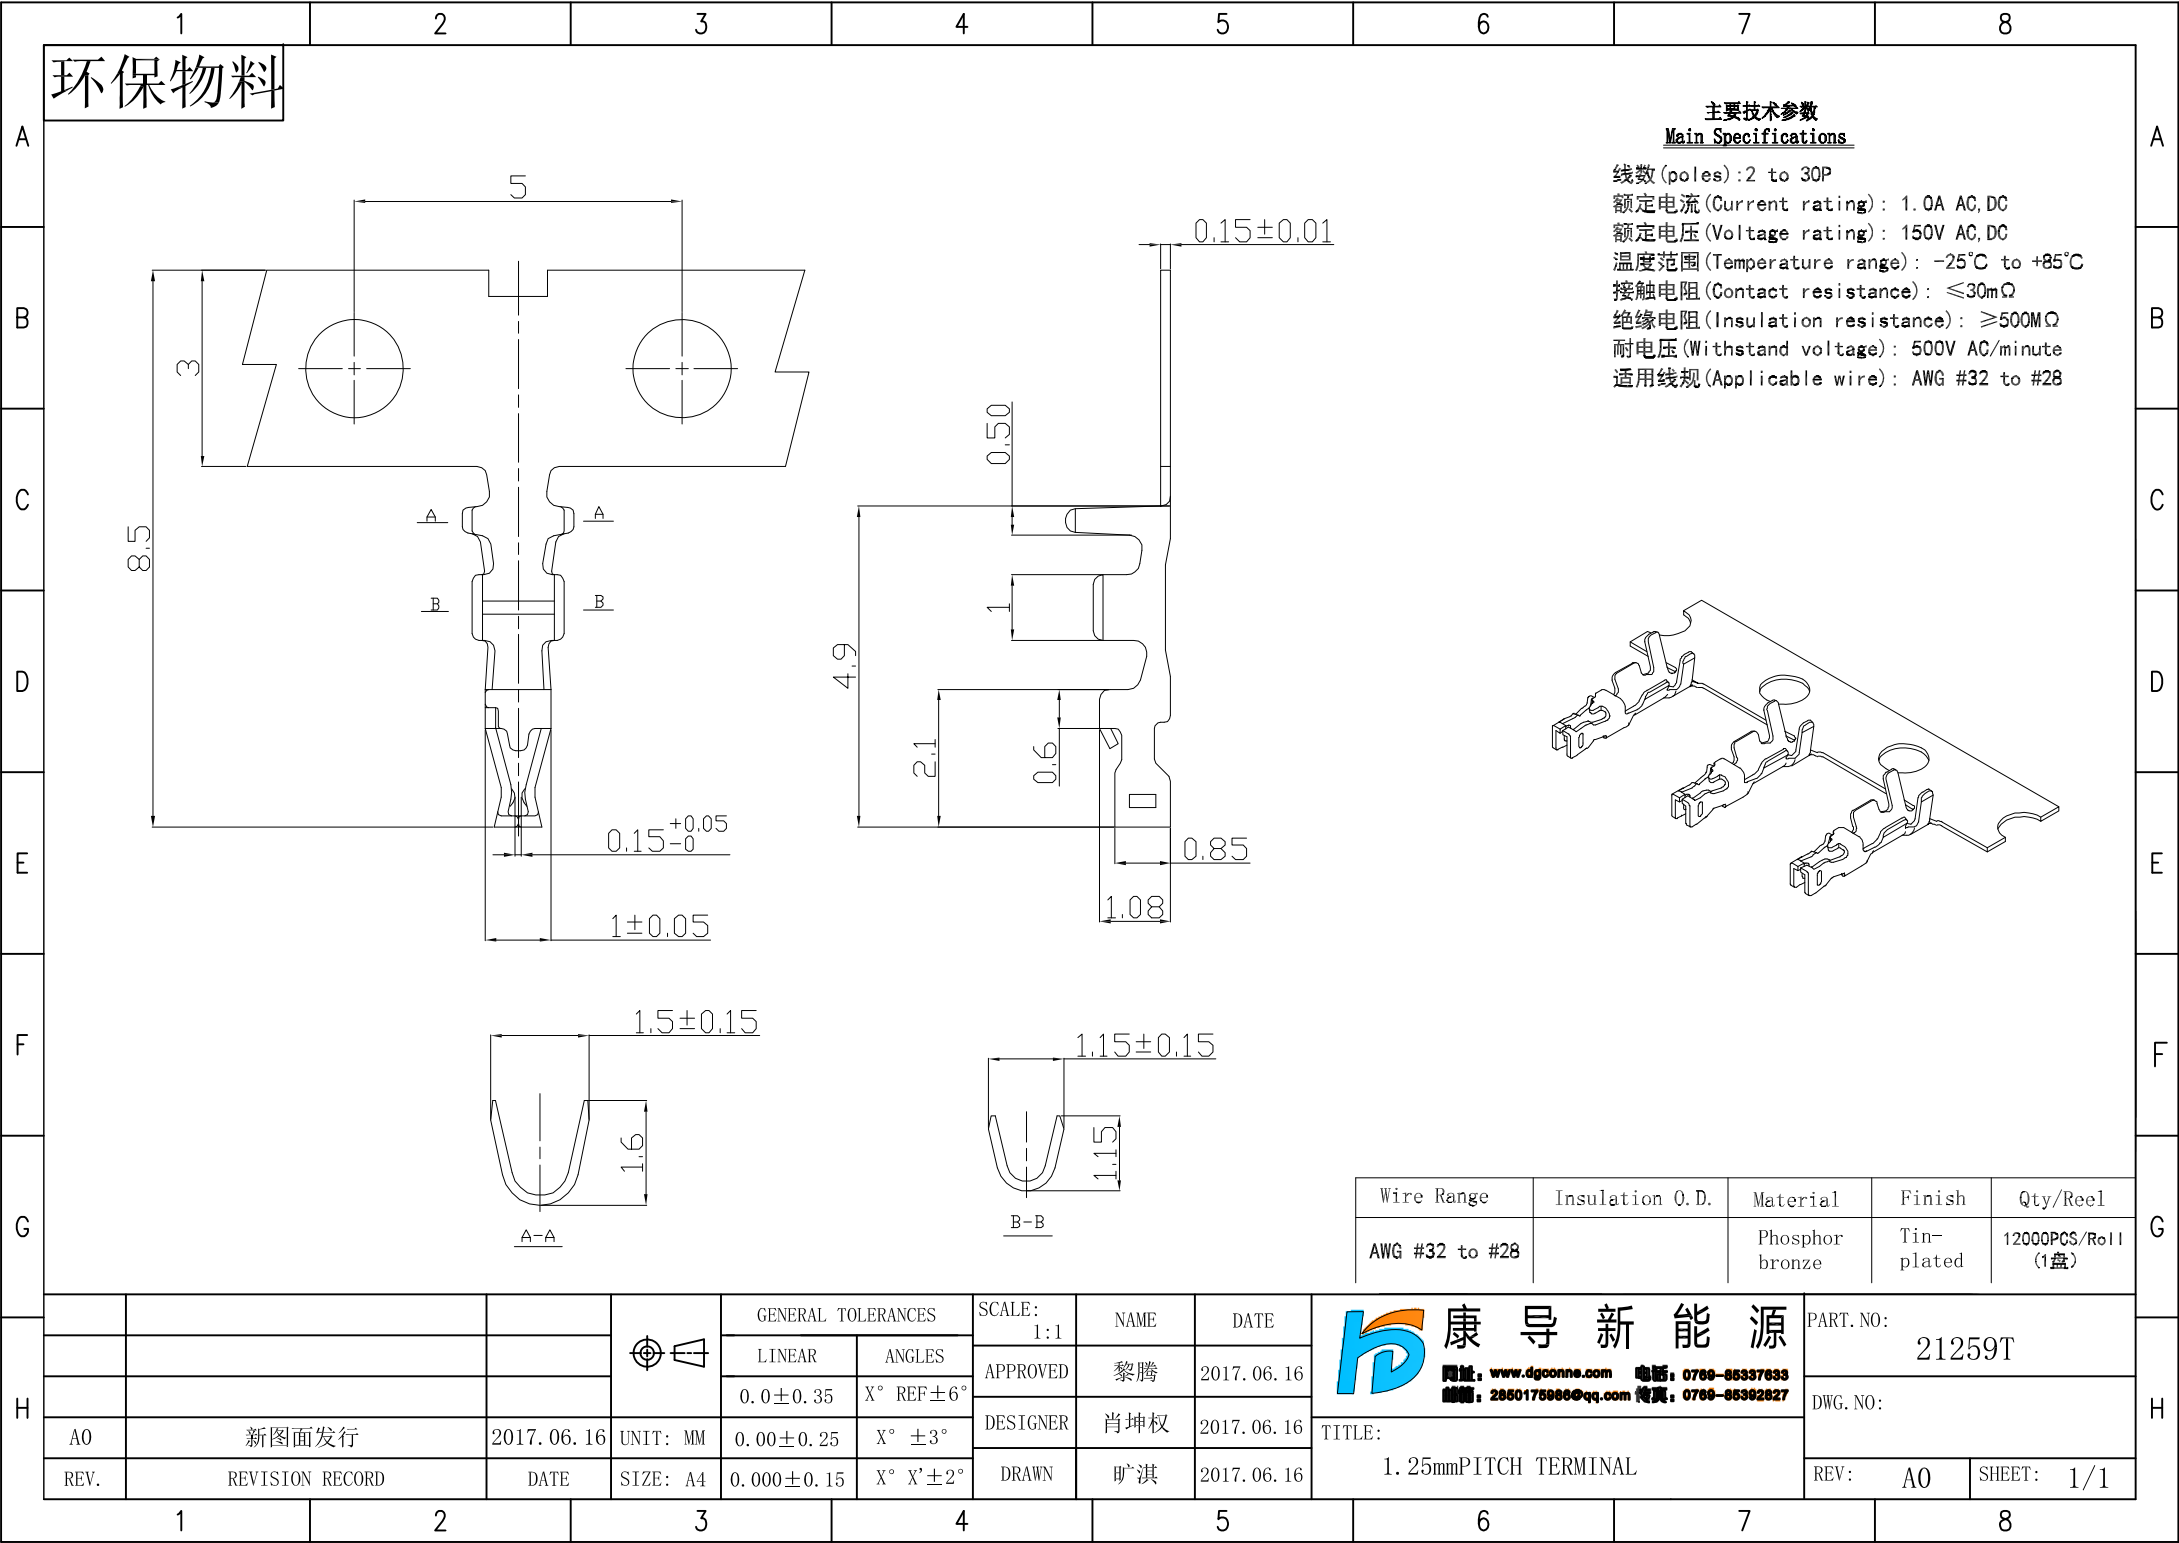
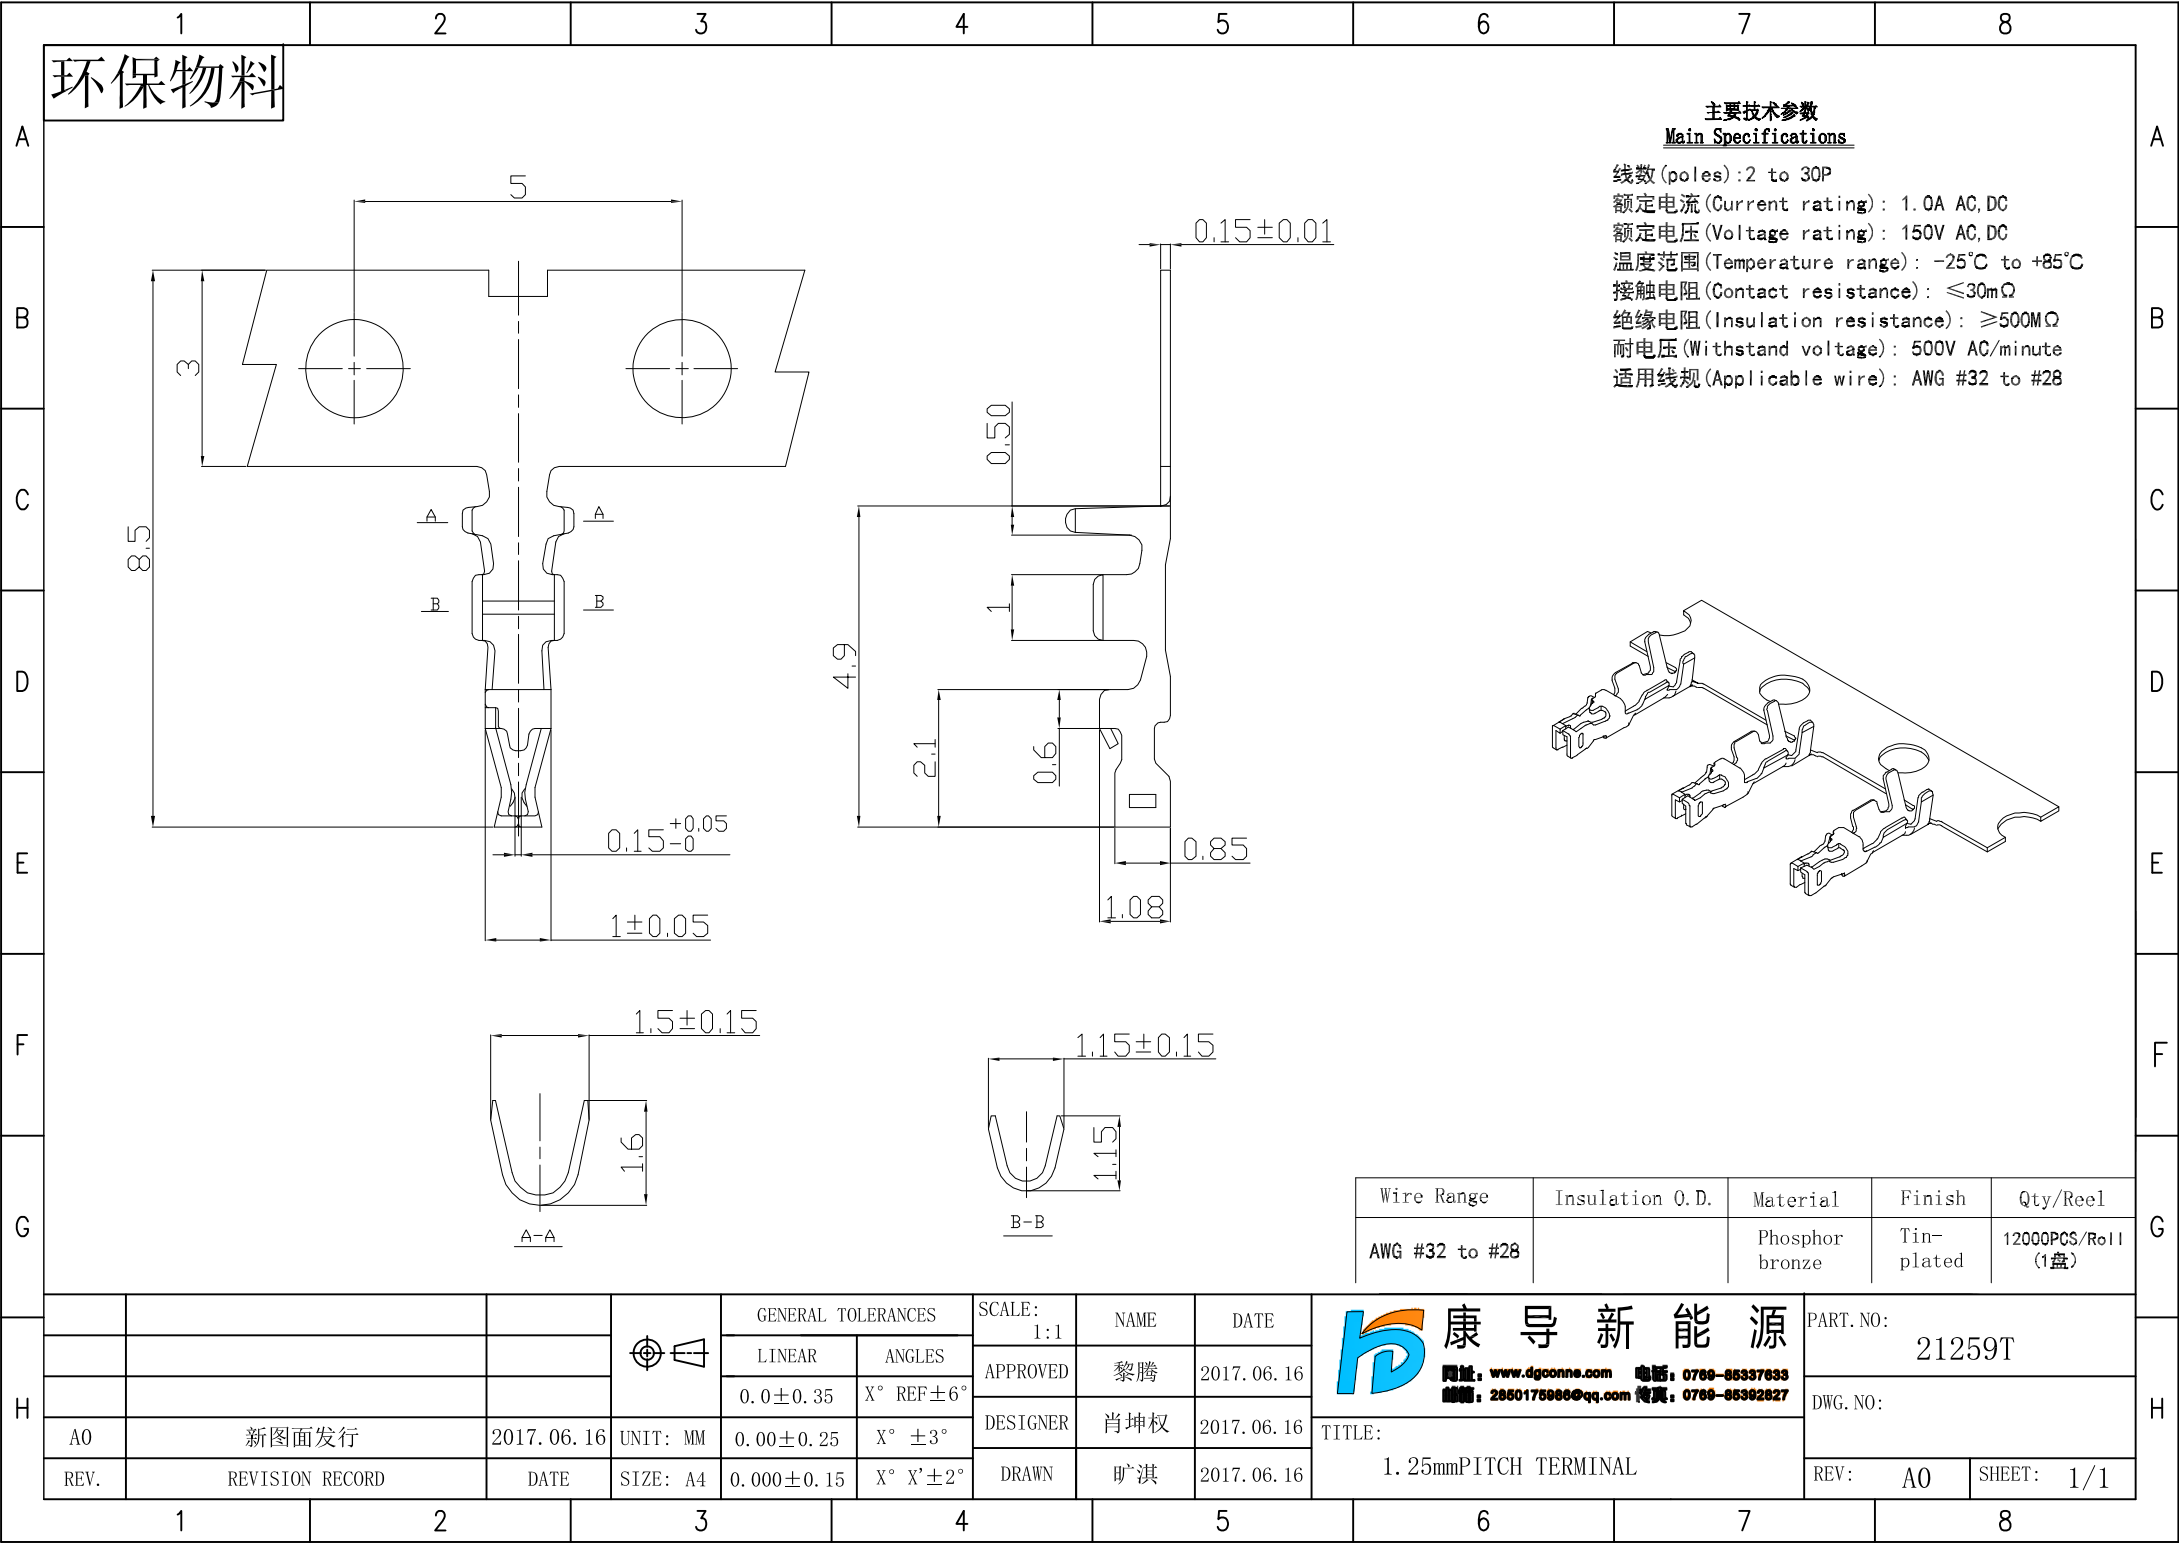
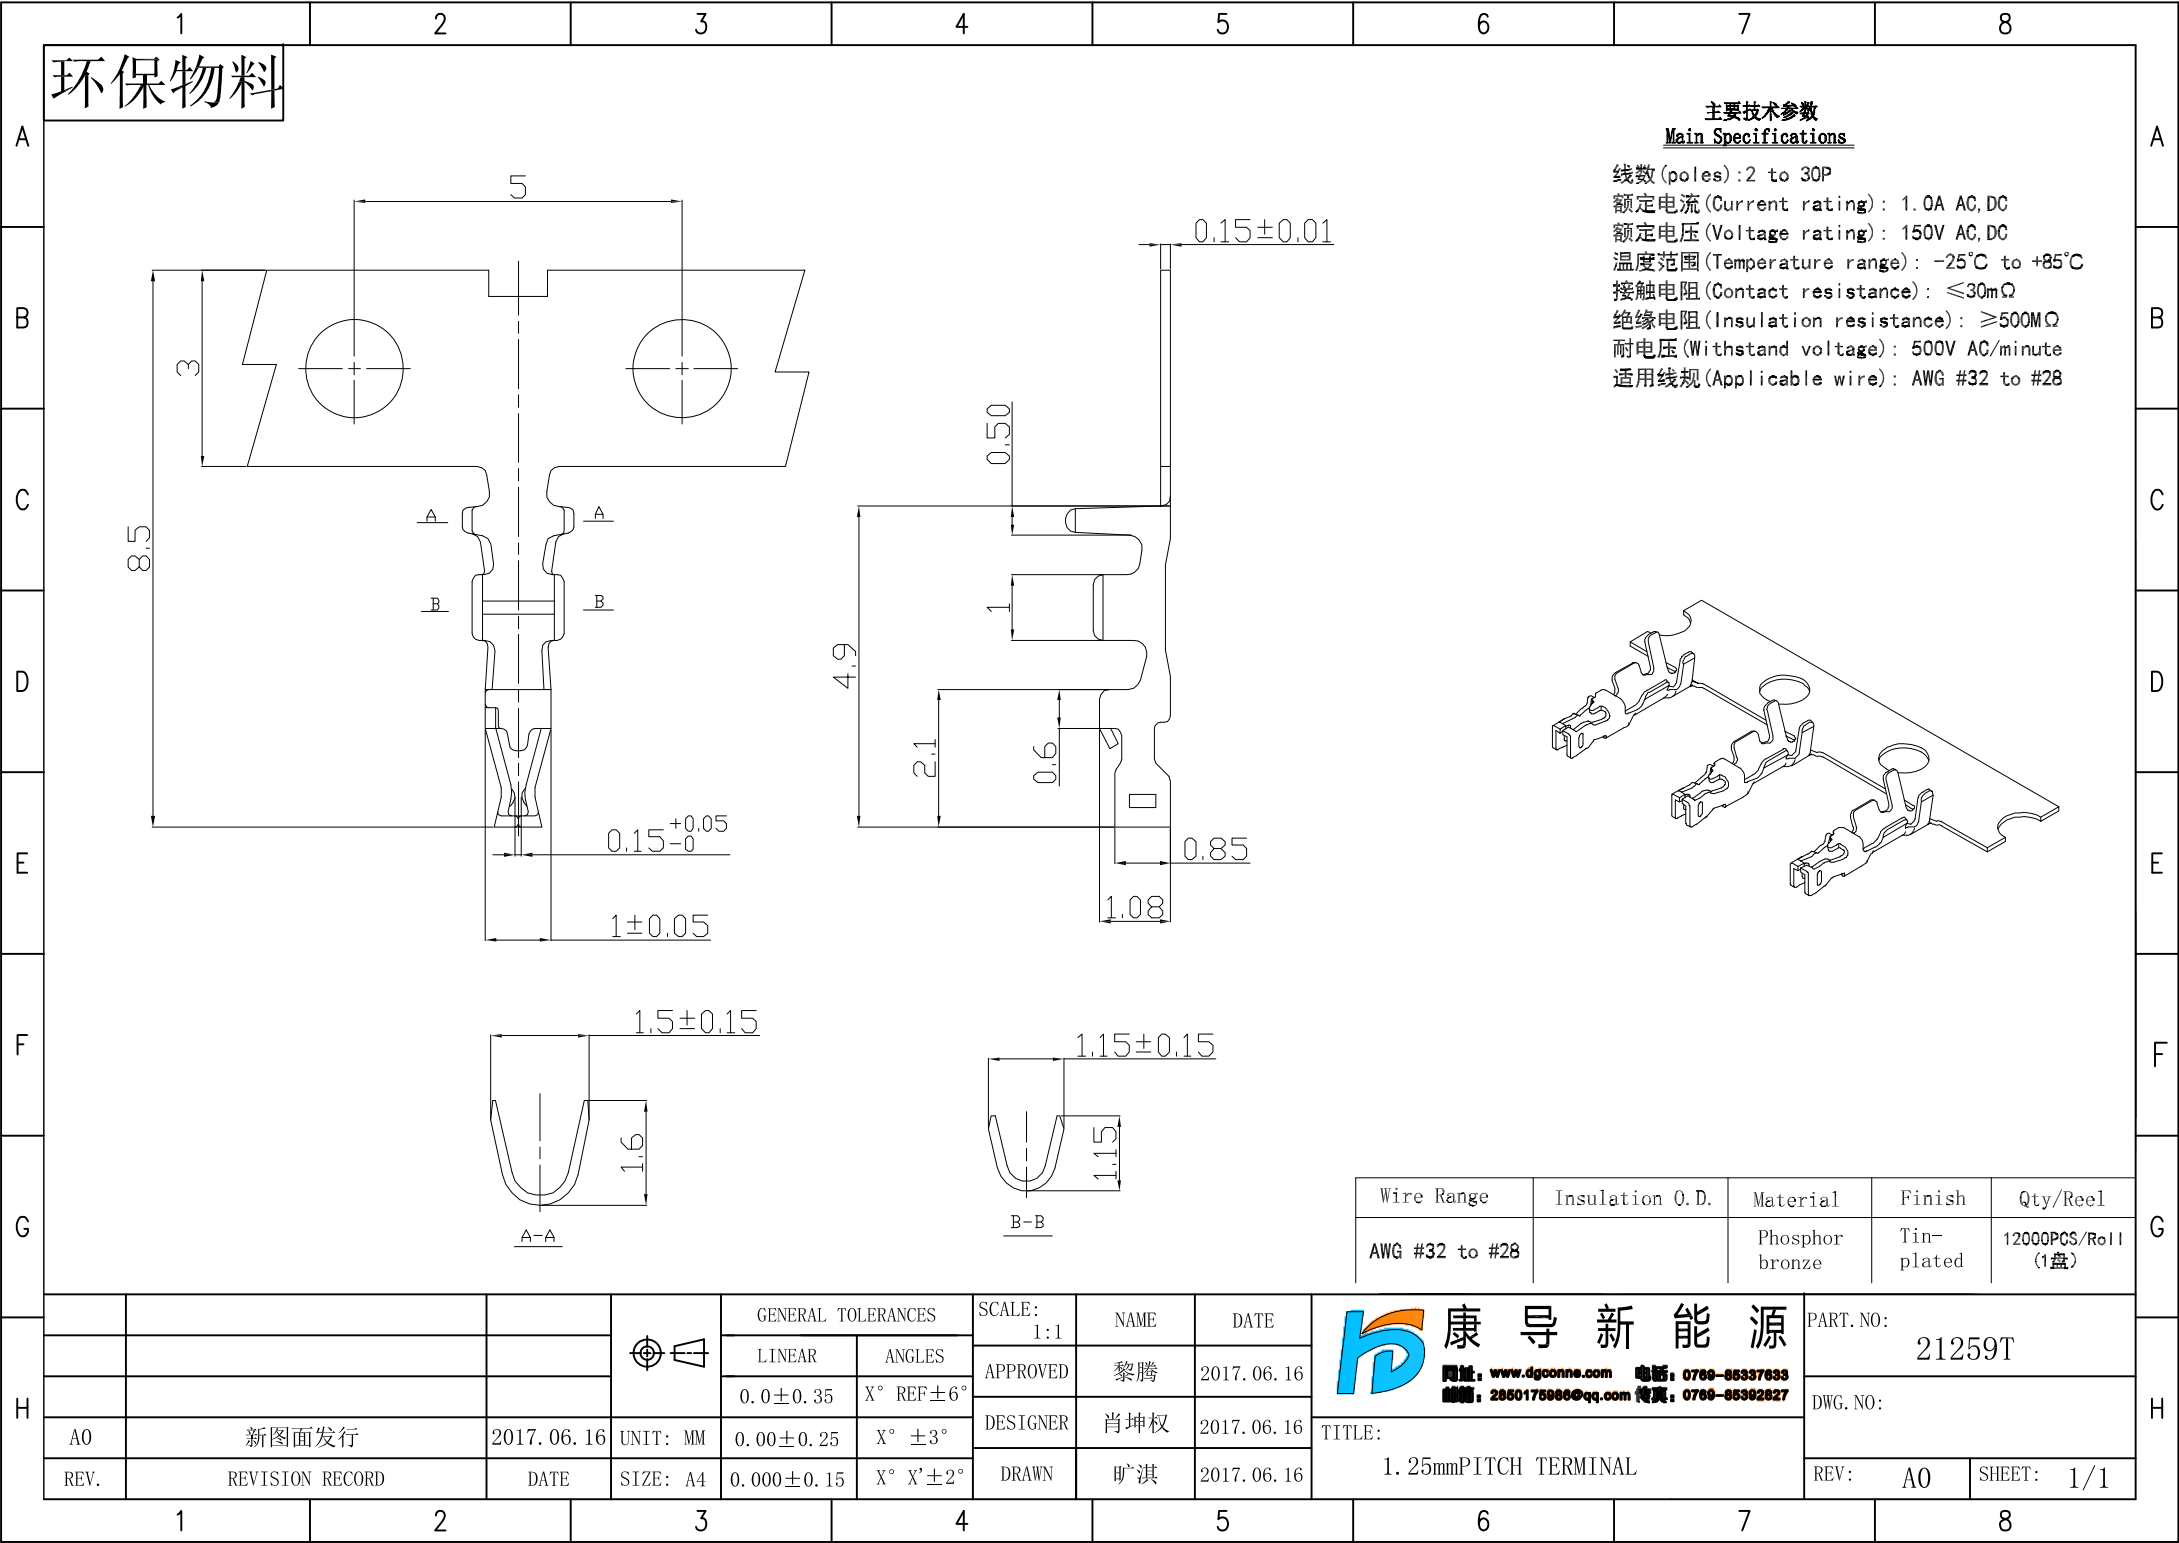


[illegible][illegible]

环保物料

主要技术参数
Main Specifications

线数 (poles): 2 to 30P
额定电流 (Current rating): 1.0A AC, DC
额定电压 (Voltage rating): 150V AC, DC
温度范围 (Temperature range): -25°C to +85°C
接触电阻 (Contact resistance): ≤30mΩ
绝缘电阻 (Insulation resistance): ≥500MΩ
耐电压 (Withstand voltage): 500V AC/minute
适用线规 (Applicable wire): AWG #32 to #28

Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
AWG #32 to #28		Phosphor bronze	Tin-plated	12000PCS/Reel (1盘)

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 康导新能源 网址: www.dgconne.com 电话: 0769-86337833 邮箱: 2860176886@qq.com 传真: 0769-86392827	PART. NO: 21259T				
				LINEAR	ANGLES					APPROVED	黎腾	2017. 06. 16	DWG. NO:	
				0. 0 ± 0. 35	X° REF ± 6°					DESIGNER	肖坤权	2017. 06. 16		
A0	新图面发行	2017. 06. 16	UNIT: MM	0. 00 ± 0. 25	X° ± 3°	DRAWN	旷淇	2017. 06. 16		TITLE: 1. 25mm PITCH TERMINAL				
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000 ± 0. 15	X° X' ± 2°					REV: A0	SHEET: 1/1			

[illegible]