

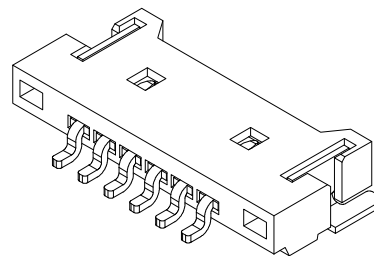
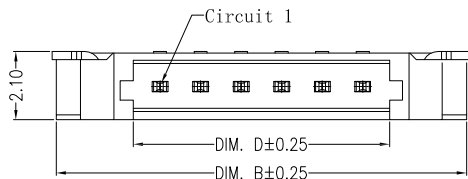
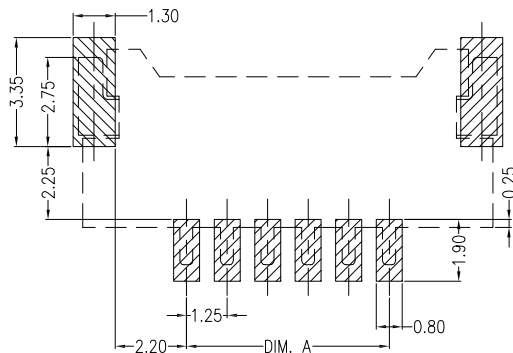



环保物料



主要技术参数 Main Specifications

线 数 (Poles): 02 to 15
接触电阻 (Contact resistance): $\leq 20m\Omega$
绝缘电阻 (Insulation resistance): $\geq 100M\Omega$
额定电压 (Rated voltage): 125V AC DC
额定电流 (Rated current): 1.0A AC DC
耐 电 压 (Withstand Voltage): 500V AC/minute
温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

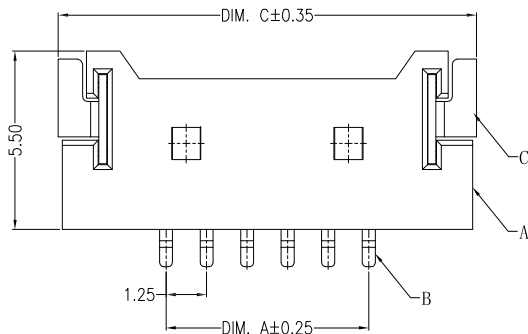

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

Circuits	Dimensions (mm)			
	DIM. A	DIM. B	DIM. C	DIM. D
02	1.25	7.65	7.90	2.90
03	2.50	8.90	9.15	4.15
04	3.75	10.15	10.40	5.40
05	5.00	11.40	11.65	6.65
06	6.25	12.65	12.90	7.90
07	7.50	13.90	14.15	9.15
08	8.75	15.15	15.40	10.40
09	10.00	16.40	16.65	11.65
10	11.25	17.65	17.90	12.90
11	12.50	18.90	19.15	14.15
12	13.75	20.15	20.40	15.40
13	15.00	21.40	21.65	16.65
14	16.25	22.65	22.90	17.9
15	17.50	23.90	24.15	19.15

C	SOLDER TAB	1 PCS	PhosphorBronze	GOLD/MATTE Sn-plated
		1 PCS	PhosphorBronze	GOLD/MATTE Sn-plated
B	CONTACT	2~30PCS	PhosphorBronze	GOLD/MATTE Sn-plated
A	PEDESTAL	2~30PIN	LCP	UL 94V-0, COLOR:BEIGE/BLACK
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 康 导 新 能 源 网址: www.dgonne.com 电话: 0769-85337633 邮箱: 2850175988@qq.com 传真: 0769-85392827	PART. NO: 21254AWR	
				LINEAR	ANGLES	APPROVED	黎腾	2017. 06. 16		DWG. NO:	
				0. 0 ± 0. 35	X° REF ± 6°						
A0	新图面发行	2017. 06. 16	UNIT: MM	0. 00 ± 0. 25	X° ± 3°	DESIGNER	肖坤权	2017. 06. 16	TITLE:		
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000 ± 0. 15	X° X' ± 2°	DRAWN	旷淇	2017. 06. 16	1. 25mmPITCH 90° WAFER SMT TYPE		
									REV: A0	SHEET: 1/1	