

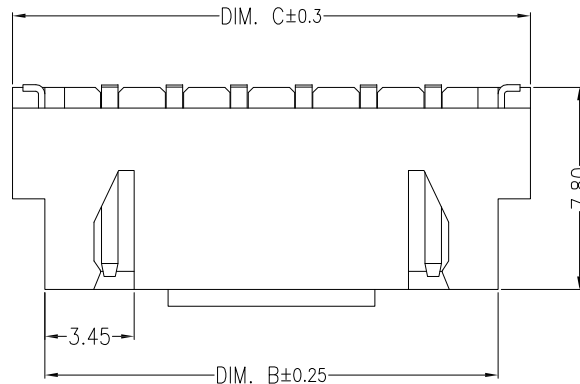


环保物料



主要技术参数 Main Specifications

线 数 (Poles): 02 to 16
接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$
额定电压 (Rated voltage): 250V AC DC
额定电流 (Rated current): 3.0A AC DC
耐 电 压 (Withstand Voltage): 1000V AC/minute
温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +105^{\circ}\text{C}$


卷装+盖

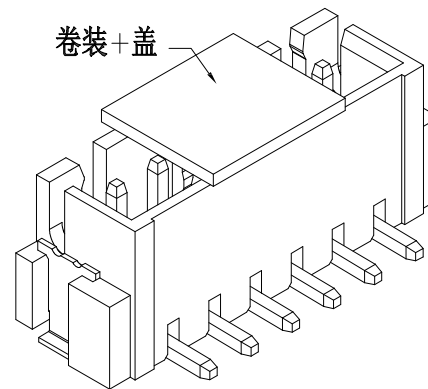

DIM A

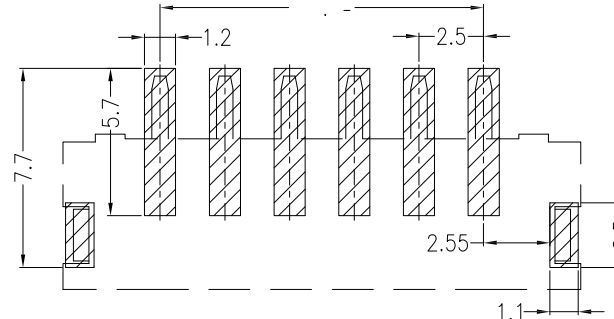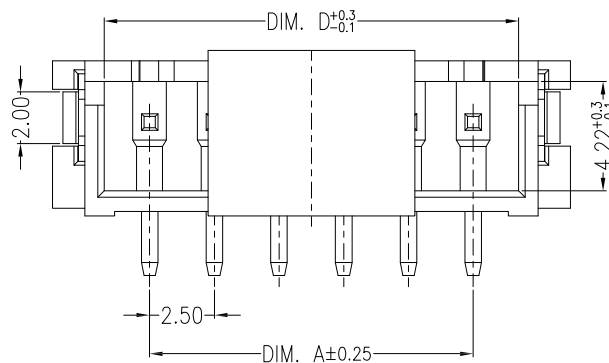

SUGGESTED PCB LAYOUT

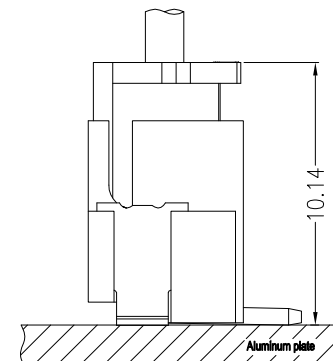

Assembly Layout

Circuit	Dimensions(mm)			
	DIM. A	DIM. B	DIM. C	DIM. D
02	2.50	7.50	10.00	6.00
03	5.00	10.00	12.50	8.50
04	7.50	12.50	15.00	11.00
05	10.00	15.00	17.50	13.50
06	12.50	17.50	20.00	16.00
07	15.00	20.00	22.50	18.50
08	17.50	22.50	25.00	21.00
09	20.00	25.00	27.50	23.50
10	22.50	27.50	30.00	26.00
11	25.00	30.00	32.50	28.50
12	27.50	32.50	35.00	31.00
13	30.00	35.00	37.50	33.50
14	32.50	37.50	40.00	36.00
15	35.00	40.00	42.50	38.50
16	37.50	42.50	45.00	41.00

C	SOLDER TAB	2 PCS	PhosphorBronze	Sn-plated
B	CONTACT	2~16 PCS	Brass	Sn-plated
A	PEDESTAL	1 PCS	LCP	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH



GENERAL TOLERANCES

LINEAR	ANGLES
0.0±0.35	X° REF±6°
0.00±0.25	X° ±3°
0.000±0.15	X° X'±2°

SCALE:
1:1

NAME

DATE

APPROVED

黎腾

2017.06.16

DESIGNER

肖坤权

2017.06.16

DRAWN

旷淇

2017.06.16



康 导 新 能 源

网址: www.dgoonne.com 电话: 0769-86337633
邮箱: 2850175988@qq.com 传真: 0769-86392827

TITLE:

2.50mmPITCH 180° WAFER SMT TYPE

PART. NO:

22501AWV

DWG. NO:

REV: A0

SHEET: 1/1

REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4
A0	新图面发行	2017.06.16		