

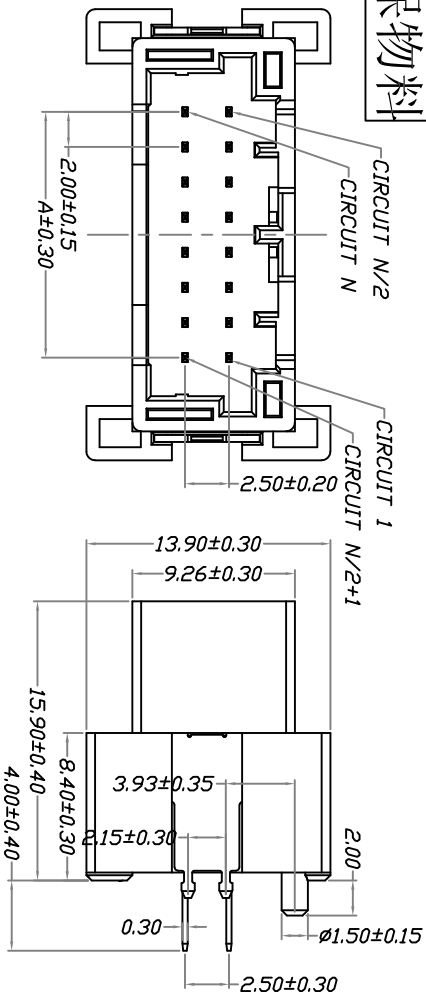





环保物料

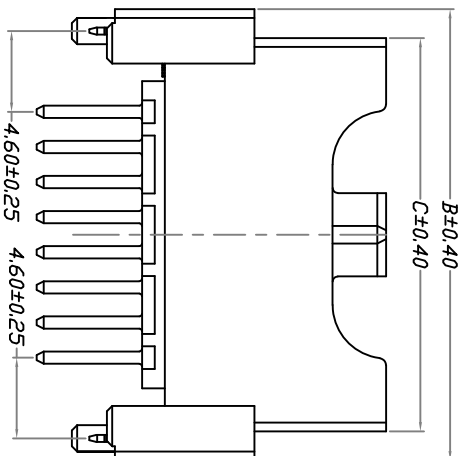

Recommended PCB pattern
THICKNESS=1.6mm; GENERAL TOLERANCES: ±0.05

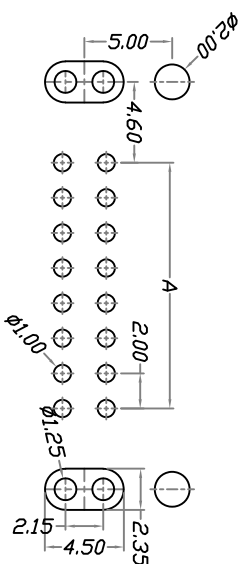

Specifications:
Voltage Rating : 50V AC/DC
Current Rating : 3.0A AC,DC(MIN.)
Withstand Voltage : 500V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 1000MΩ(MIN.)
Temperature Range : -40°C~+125°C

Part No	Dimensions			
	C	B	A	
2*20P	48.40	49.70	38.00	
2*18P	44.40	45.70	34.00	
2*16P	40.40	41.70	30.00	
2*14P	36.40	37.70	26.00	
2*12P	32.40	33.70	22.00	
2*10P	28.40	29.70	18.00	
2*8P	22.40	23.70	14.00	
2*6P	18.40	21.70	10.00	
2*4P	14.40	17.70	6.00	
2*2P	10.40	13.70		

Part No.	Material	Color	PIN Material
42015W00-2XNPA-A1*-**	PPS,UL94V-0	BLACK	High conductivity copper

GENERAL TOLERANCES

SCALE: 1:1

LINEAR

APPROVED

NAME

DATE

ANGLES

APPROVED

NAME

DATE

0.0±0.25

APPROVED

NAME

DATE

X° REF±6°

APPROVED

NAME

DATE

X° ±3°

APPROVED

NAME

DATE

X° X'±2°

APPROVED

NAME

DATE



康导新能源
地址: www.kdsource.com
电话: 0780-88387783
传真: 280017888@qq.com 传真: 0780-88382382

PART. NO:
42015W00-2XNPA-A1*-**

DWG. NO:

ENDE05

REV: A0 SHEET: 1/1

1 2 3 4 5 6 7 8