

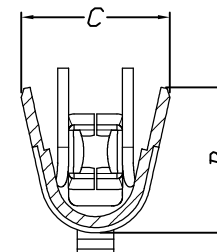
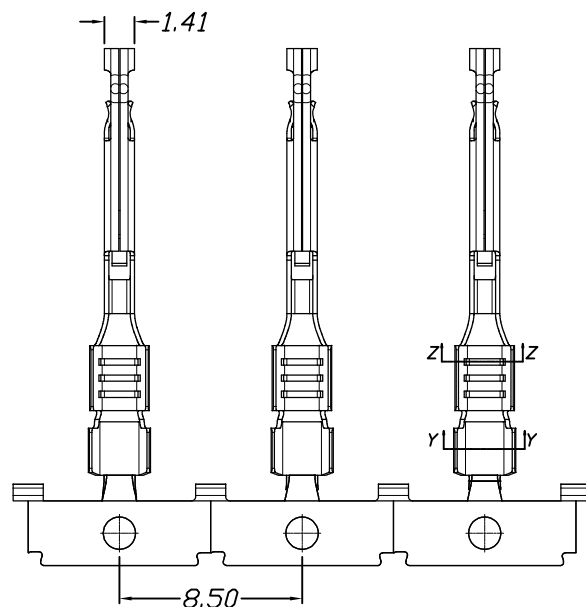


	1	2	3	4	5	6	7	8																																																										
A	环保物料																																																																	
B	Specifications: Voltage Rating : 250V AC/DC Current Rating : 7A AC,DC Withstand Voltage : 1500V AC/minute Contact Resistance : 20mΩ(MAX.) Insulation Resistance : 1000V DC/1000MΩ(MIN.) Temperature Range : -40°C~+120°C																																																																	
C																																																																		
D																																																																		
E																																																																		
F																																																																		
G	<table><tr><th>Part No</th><th>Wire Range</th><th>Insula- tion O. D.</th><th>Material</th><th>Finish</th><th>DIM`B``</th><th>DIM`B``</th><th>DIM`B``</th><th>DIM`B``</th></tr><tr><td>43501T0 P-**</td><td>AWG#16 -#18</td><td>1. 70mm (max)</td><td>Phosphor Bronze</td><td>Au or Sn</td><td>2. 71</td><td>2. 77</td><td>2. 63</td><td>2. 89</td></tr><tr><td>43501T0 P-**</td><td>AWG#20 -#22</td><td>1. 30mm (max)</td><td>Phosphor Bronze</td><td>Au or Sn</td><td>2. 16</td><td>2. 20</td><td>2. 08</td><td>2. 33</td></tr></table>								Part No	Wire Range	Insula- tion O. D.	Material	Finish	DIM`B``	DIM`B``	DIM`B``	DIM`B``	43501T0 P-**	AWG#16 -#18	1. 70mm (max)	Phosphor Bronze	Au or Sn	2. 71	2. 77	2. 63	2. 89	43501T0 P-**	AWG#20 -#22	1. 30mm (max)	Phosphor Bronze	Au or Sn	2. 16	2. 20	2. 08	2. 33																															
Part No	Wire Range	Insula- tion O. D.	Material	Finish	DIM`B``	DIM`B``	DIM`B``	DIM`B``																																																										
43501T0 P-**	AWG#16 -#18	1. 70mm (max)	Phosphor Bronze	Au or Sn	2. 71	2. 77	2. 63	2. 89																																																										
43501T0 P-**	AWG#20 -#22	1. 30mm (max)	Phosphor Bronze	Au or Sn	2. 16	2. 20	2. 08	2. 33																																																										
H	<table><tr><td></td><td></td><td></td><td rowspan="3"></td><td colspan="2">GENERAL TOLERANCES</td><td rowspan="3">SCALE: 1:1</td><td rowspan="3">NAME</td><td rowspan="3">DATE</td><td rowspan="5"> 康导新能源 网址: www.dgconne.com 电话: 0769-86337633 邮箱: 2850175906@qq.com 传真: 0769-86392827 </td><td>PART. NO:</td><td colspan="2">43501T*P-**</td></tr><tr><td></td><td></td><td></td><td>LINEAR</td><td>ANGLES</td><td>APPROVED</td><td></td><td></td><td>DWG. NO:</td><td colspan="2">ENDE05</td></tr><tr><td></td><td></td><td></td><td>0. 0 ± 0. 35</td><td>X° REF ± 6°</td><td>DESIGNER</td><td></td><td></td><td>REV:</td><td>AO</td><td>SHEET:</td><td>1/1</td></tr><tr><td>AO</td><td>新图面发行</td><td>2018. 7. 28</td><td>UNIT: MM</td><td>0. 00 ± 0. 25</td><td>X° ± 3°</td><td rowspan="2">DRAWN</td><td rowspan="2">肖坤权</td><td rowspan="2">2018. 7. 28</td><td>TITLE:</td><td colspan="2">3. 50mm pitch Crimp Terminal</td></tr><tr><td>REV.</td><td>REVISION RECORD</td><td>DATE</td><td>SIZE: A4</td><td>0. 000 ± 0. 15</td><td>X° X' ± 2°</td><td colspan="2"></td><td></td><td></td></tr></table>												GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	康导新能源 网址: www.dgconne.com 电话: 0769-86337633 邮箱: 2850175906@qq.com 传真: 0769-86392827	PART. NO:	43501T*P-**					LINEAR	ANGLES	APPROVED			DWG. NO:	ENDE05					0. 0 ± 0. 35	X° REF ± 6°	DESIGNER			REV:	AO	SHEET:	1/1	AO	新图面发行	2018. 7. 28	UNIT: MM	0. 00 ± 0. 25	X° ± 3°	DRAWN	肖坤权	2018. 7. 28	TITLE:	3. 50mm pitch Crimp Terminal		REV.	REVISION RECORD	DATE	SIZE: A4	0. 000 ± 0. 15	X° X' ± 2°				
				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	康导新能源 网址: www.dgconne.com 电话: 0769-86337633 邮箱: 2850175906@qq.com 传真: 0769-86392827	PART. NO:	43501T*P-**																																																							
				LINEAR	ANGLES					APPROVED				DWG. NO:					ENDE05																																															
				0. 0 ± 0. 35	X° REF ± 6°					DESIGNER			REV:	AO	SHEET:	1/1																																																		
AO	新图面发行	2018. 7. 28	UNIT: MM	0. 00 ± 0. 25	X° ± 3°	DRAWN	肖坤权	2018. 7. 28		TITLE:	3. 50mm pitch Crimp Terminal																																																							
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000 ± 0. 15	X° X' ± 2°																																																													
	1	2	3	4	5	6	7	8																																																										

Voltage Rating : 250V AC/DC
Current Rating : 7A AC,DC
Withstand Voltage : 1500V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 1000V DC/1000MΩ(MIN.)
Temperature Range : -40°C~+120°C

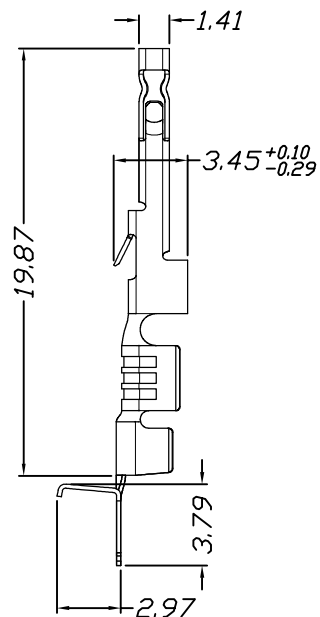

SECTION Z-Z



SECTION Y-Y

<i>Part No</i>	<i>Wire Range</i>	<i>Insulation O. D.</i>	<i>Material</i>	<i>Finish</i>	<i>DIM"B"</i>	<i>DIM"B"</i>	<i>DIM"B"</i>	<i>DIM"B"</i>
43501T0 <i>P-**</i>	AWG#16 -#18	1. 70mm (max)	Phosphor Bronze	<i>Au or Sn</i>	2. 71	2. 77	2. 63	2. 89
43501T0 <i>P-**</i>	AWG#20 -#22	1. 30mm (max)	Phosphor Bronze	<i>Au or Sn</i>	2. 16	2. 20	2. 08	2. 33

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 康导新能源 网址: www.dgconne.com 电话: 0769-85337833 邮箱: 2850175986@qq.com 传真: 0769-85392827	PART. NO: 43501T*P-**-	
				LINEAR	ANGLES	APPROVED					
				0.0±0.35	X° REF±6°	DESIGNER				REV: AO SHEET: 1/1	
AO	新图面发行	2018.7.28	UNIT: MM	0.00±0.25	X° ±3°					TITLE: 3.50mm pitch Crimp Terminal	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°	DRAWN	肖坤权	2018.7.28			