

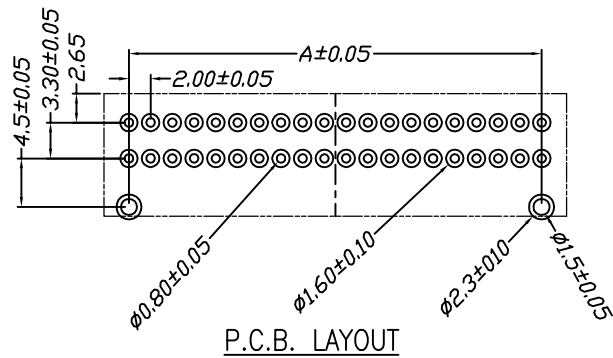
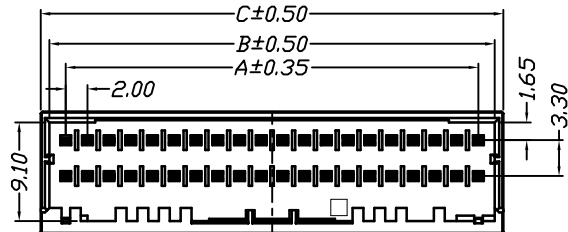
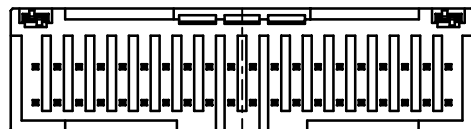


环保物料



Specifications:
Voltage Rating : 250V AC/DC
Current Rating : 3A AC,DC
Withstand Voltage : 1000V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 100MΩ(MIN.)
Temperature Range : -55°C~+105°C

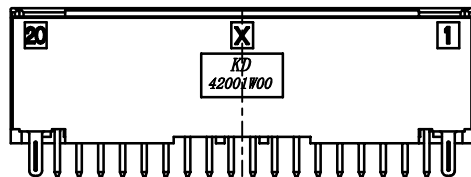

Part No	Dimensions		
	A	B	C
2*5P	8.00	11.00	12.60
2*10P	18.00	21.00	22.60
2*11P	20.00	23.00	24.60
2*13P	24.00	27.00	28.60
2*14P	26.00	29.00	30.60
2*15P	28.00	31.00	32.60
2*16P	30.00	33.00	34.60
2*17P	32.00	35.00	36.60
2*20P	38.00	41.00	42.60

Material	Color	PIN Material
PBT,UL94V-0	Gray	Brass

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
				0.0±0.25	X° REF±6°			
AO	新图面发行	2017.06.16	UNIT: MM	0.00±0.15	X° ±3°	APPROVED	黎腾	2017.06.16
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DESIGNER	肖坤权	2017.06.16
						DRAWN	旷淇	2017.06.16



TITLE:
2.00mm pitch Dual Wafer

PART. NO:	42001W00-2*NPA-A1-**	
DWG. NO:	ENDE05	
REV:	A0	SHEET: 1/1