
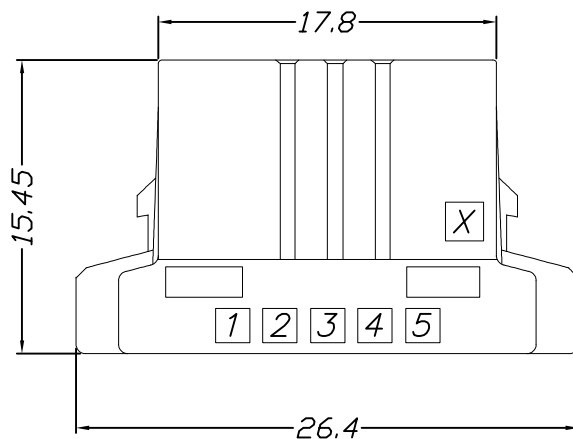
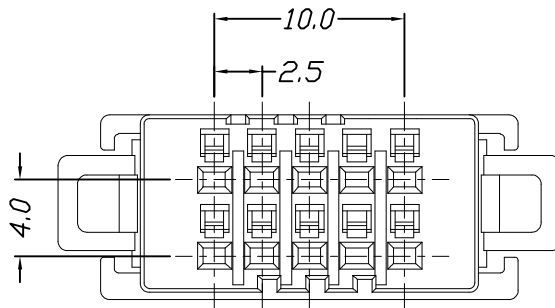


环保物料

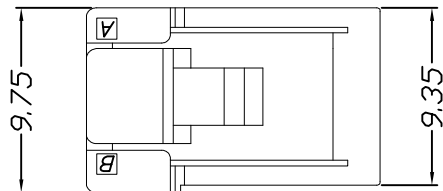

Specifications:

Voltage Rating : 250V AC/DC

Current Rating : 4.6A AC,DC

Withstand Voltage : 1500V AC/minute

Contact Resistance : 20mΩ(MAX.)

Insulation Resistance : 1000V DC/1000MΩ(MIN.)

Temperature Range : -55°C~+105°C

Material	Color
PBT,UL94V-0	Black

REV.	新图面发行	2018. 7. 28	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
				0. 0±0. 35	X° REF±6°			
AO	新图面发行	2018. 7. 28	UNIT: MM	0. 00±0. 25	X° ±3°	APPROVED		
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000±0. 15	X° X'±2°	DESIGNER		
						DRAWN	肖坤权	2018. 7. 28



PART. NO:
42505H00-2X5P*-PT

DWG. NO:
ENDE05

REV: AO SHEET: 1/1

TITLE:
2.50mm pitch Dual Housing