

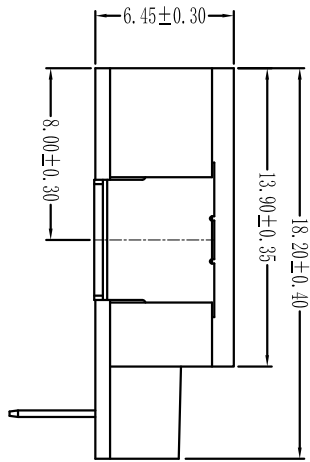
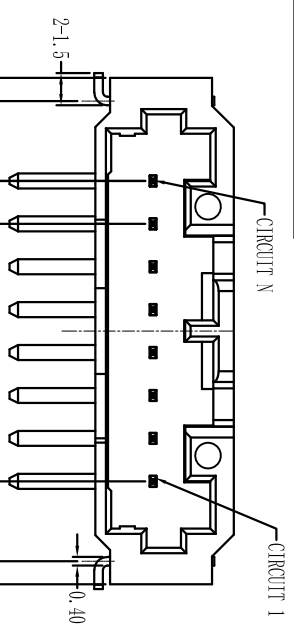
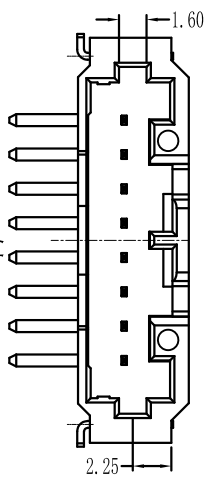


环保物料


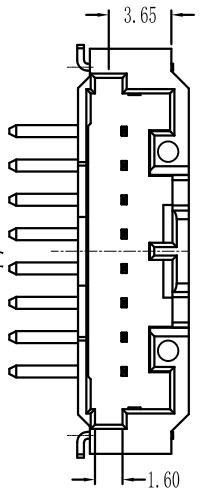


Specifications:
Voltage Rating : 50V AC/DC
Current Rating : 3.0A AC,DC(MIN.)
Withstand Voltage : 500V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 1000MΩ(MIN.)
Temperature Range : -40°C~+125°C



42015W90-NPA-A7X-**

42015W90-NPA-A7X-**

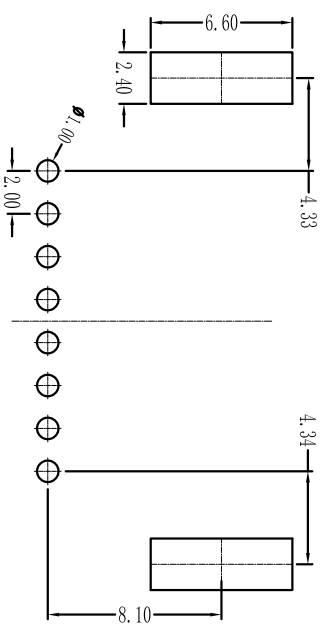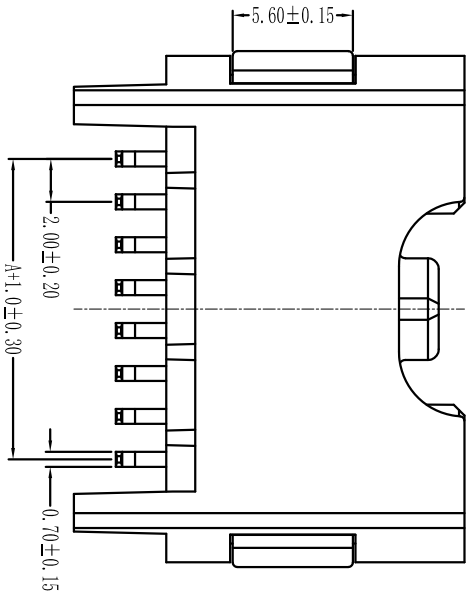


Recommended PCB pattern
THICKNESS=1.6mm; GENERAL TOLERANCES: ±0.05

Part No.	Material	Color	PIN Material
42015W90-NPA-A7*-**	PPS,UL94V-0	BLACK	High conductivity copper

GENERAL TOLERANCES

SCALE: 1:1

NAME	DATE
黎腾	2017.06.16



PART. NO:
42015W90-NPA-A7*-**

LINER	ANGLES
0.0±0.25	X° REF±6°

APPROVED	DESIGNER
黎腾	肖坤权

TITLE:
2.00mm pitch Single Wafer

DWG. NO:
ENDE05

REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	旷淇	2017.06.16	2.00mm pitch Single Wafer	REV: A0	SHEET: 1/1
------	-----------------	------	----------	------------	----------	-------	----	------------	---------------------------	---------	------------