

环保物料

Specifications:

Voltage Rating : 250V AC/DC


Current Rating : 4.6A AC,DC

Withstand Voltage : 1500V AC/minute

Contact Resistance : 20mΩ(MAX.)

Insulation Resistance : 1000V DC/1000MΩ(MIN.)

Temperature Range : -55°C~+105°C

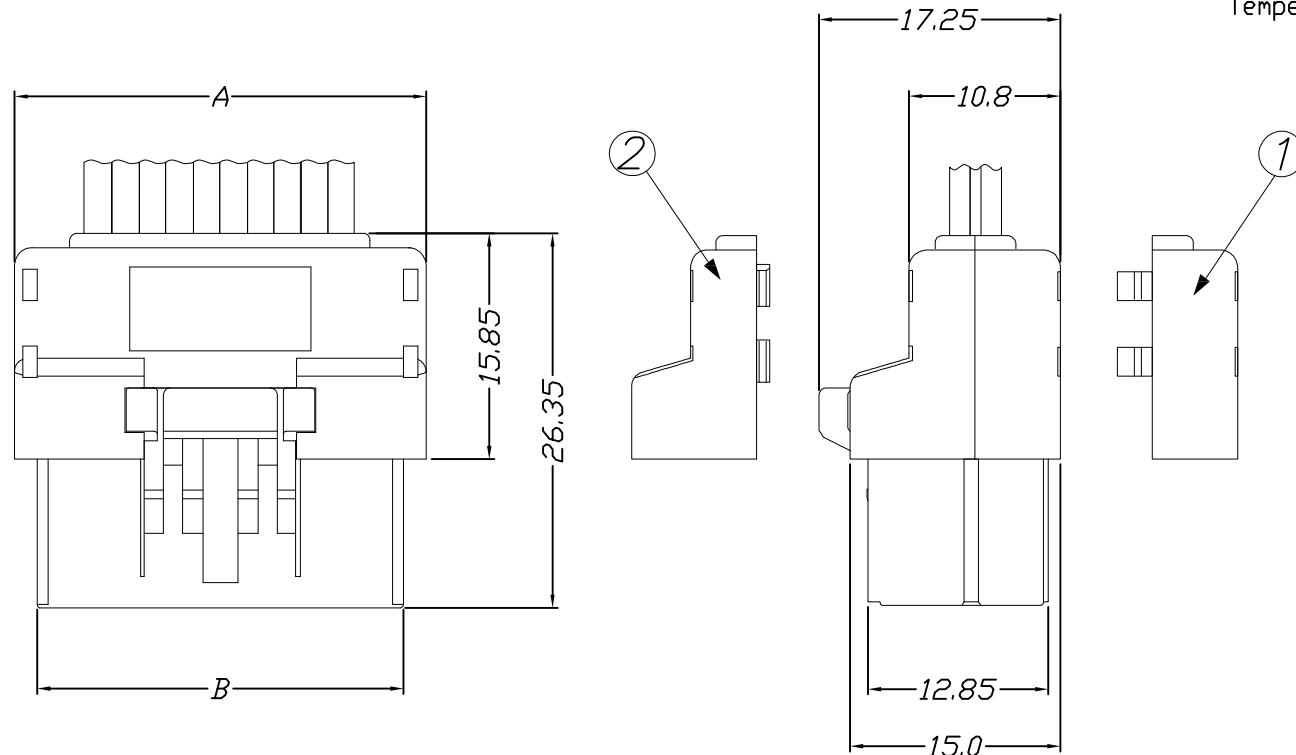

Part No.	Dimensions	
	A	B
2*3P	11.60	8.30
2*4P	14.10	10.80
2*5P	16.60	13.30
2*8P	24.10	20.80
2*10P	29.10	25.80

Material

Color

PBT,UL94V-0

Black



GENERAL TOLERANCES

SCALE:
1:1

NAME

DATE

LINEAR

ANGLES

APPROVED

DESIGNER

DRAWN

肖坤权

2018. 7. 28



康导新能源

网址: www.dgoonne.com 电话: 0769-85337633
邮箱: 2850175988@qq.com 传真: 0769-85392827

TITLE:

2.50mm pitch Dual Housing

PART. NO:

42505H00-2X5P*-G1-PT

DWG. NO:

ENDE05

REV:

A0

SHEET:

1/1