

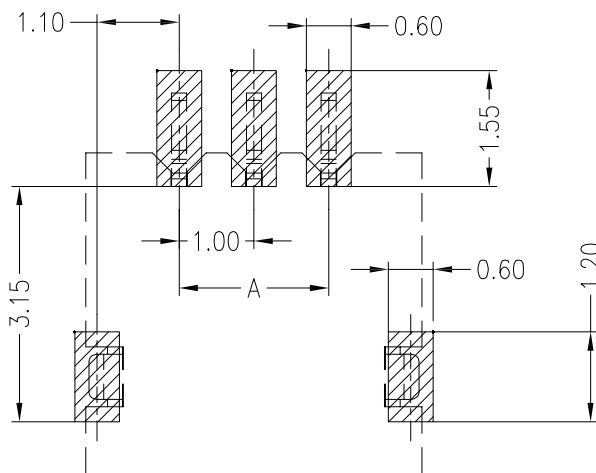
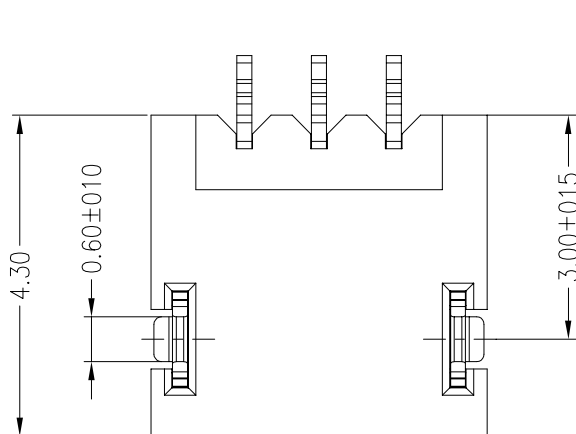
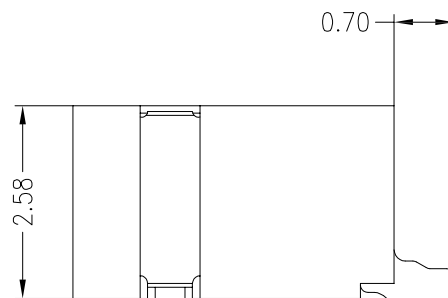


环保物料

Specifications:
Poles: 02 to 20
Contact resistance: $\leq 20\text{m}\Omega$
Insulation resistance: $\geq 100\text{M}\Omega$
Rated voltage: 125V AC DC
Rated current: 1.0A AC DC
Withstand Voltage: 500V AC/minute
Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Housing: PA6T UL94V-0, Natural
Contacts: Phosphor Bronze/Matte Sn-plated
Solder Tabs: Brass/Matte Sn-plated

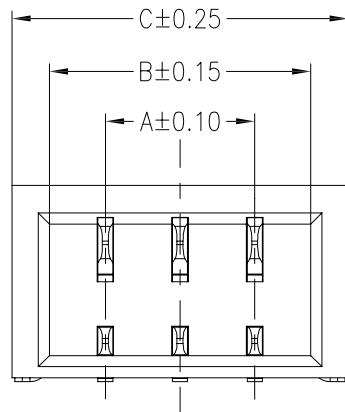

PCB LAYOUT(Tolerance: ± 0.05)

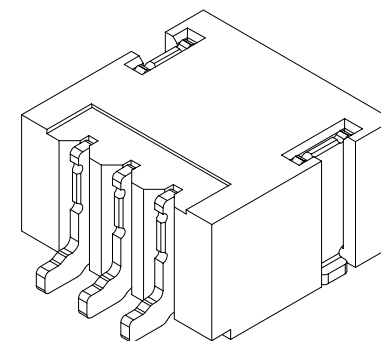

孔位	尺寸	A	B	C	孔位	尺寸	A	B	C
2P		1.00	2.50	3.50	12P		11.00	12.5	13.5
3P		2.00	3.50	4.50	13P		12.00	13.5	14.5
4P		3.00	4.50	5.50	14P		13.00	14.5	15.5
5P		4.00	5.50	6.50	15P		14.00	15.5	16.5
6P		5.00	6.50	7.50	16P		15.00	16.5	17.5
7P		6.00	7.50	8.50	17P		16.00	17.5	18.5
8P		7.00	8.50	9.50	18P		17.00	18.5	19.5
9P		8.00	9.50	10.5	19P		18.00	19.5	20.5
10P		9.00	10.50	11.5	20P		19.00	20.5	21.5
11P		10.00	11.50	12.5					

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 康 导 新 能 源 网址: www.dgconne.com 电话: 0769-85337633 邮箱: 2850175988@qq.com 传真: 0769-85392827	PART. NO: 21003AWR		
				LINEAR	ANGLES	APPROVED	黎腾	2017. 06. 16		DWG. NO:		
				0. 0±0. 35	X° REF±6°							
AO	新图面发行	2017. 06. 16		UNIT: MM	0. 00±0. 25	X° ±3°	DESIGNER	肖坤权			2017. 06. 16	TITLE: 1. 0mmPITCH 90° WAFER SMT TYPE
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000±0. 15	X° X' ±2°	DRAWN	旷淇	2017. 06. 16			REV: AO	SHEET: 1/1