

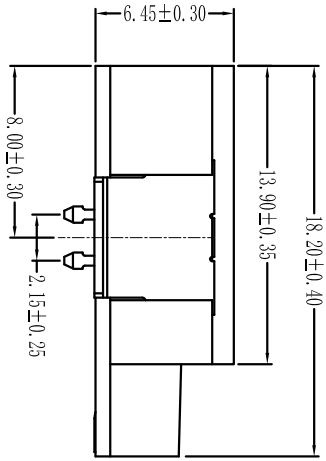
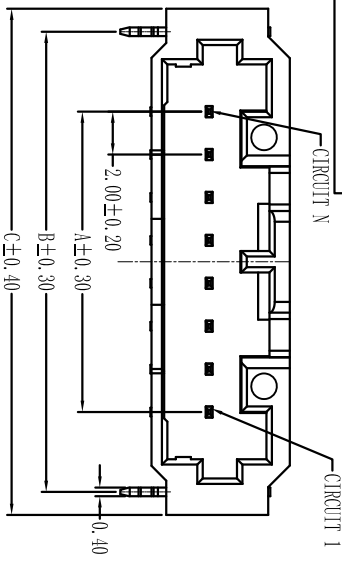
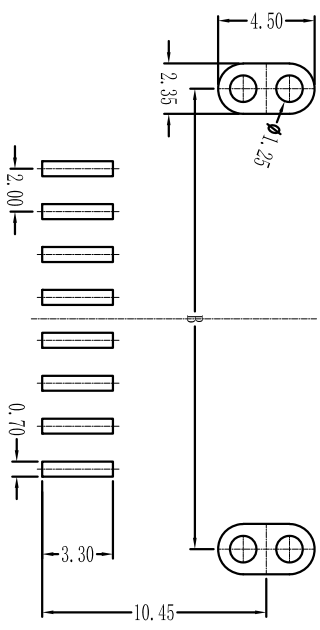


环保物料

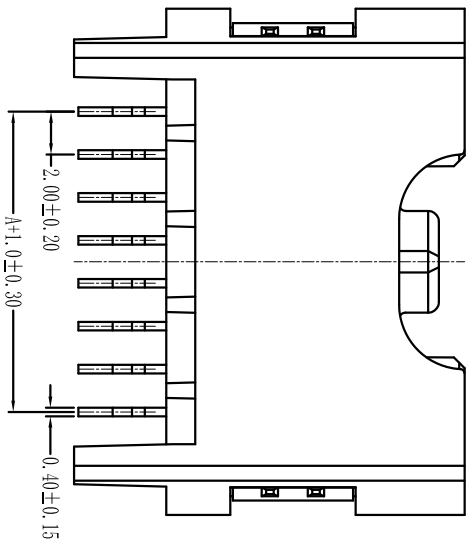

Specifications:
Voltage Rating : 50V AC/DC
Current Rating : 3.0A AC,DC(MIN.)
Withstand Voltage : 500V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 1000MΩ(MIN.)
Temperature Range : -40°C~+125°C

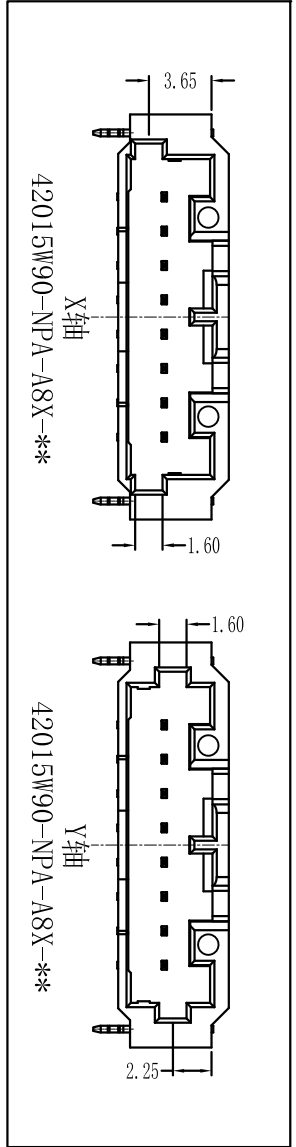

Recommended PCB pattern
THICKNESS=1.6mm; GENERAL TOLERANCES: ±0.05

Circuits Part No	Dimensions		
	A	B	C
20P	38.00	45.45	47.60
18P	34.00	41.45	43.60
16P	30.00	37.45	39.60
14P	26.00	33.45	35.60
12P	22.00	29.45	31.60
10P	18.00	25.45	27.60
8P	14.00	21.45	23.60
6P	10.00	17.45	19.60
4P	6.00	13.45	15.60
2P		9.45	11.60

Part No.	Material	Color	PIN Material
42015W90-NPA-A8*-**	PPS,UL94V-0	BLACK	High conductivity copper

GENERAL TOLERANCES		SCALE:	
L: LINEAR	A: ANGLES	1:1	

NAME	DATE	康导新能源 www.dgocnn.com 电话: 0783-65337633 地址: 285017588@qq.com 传真: 0783-6532627	PART. NO: 42015W90-NPA-A8*-**
APPROVED	2017.06.16		

DESIGNER	2017.06.16	康导新能源 www.dgocnn.com 电话: 0783-65337633 地址: 285017588@qq.com 传真: 0783-6532627	PART. NO: 42015W90-NPA-A8*-**
DRAWN	2017.06.16		

UNIT: MM	0.00 ± 0.15	X° ± 3°	康导新能源 www.dgocnn.com 电话: 0783-65337633 地址: 285017588@qq.com 传真: 0783-6532627	PART. NO: 42015W90-NPA-A8*-**
SIZE: A4	0.000 ± 0.08	X° X' ± 2°		

REVISION RECORD	DATE	1	2	3	4	5	6	7	8
REV.	2017.06.16	1	2	3	4	5	6	7	8