

环保物料

主要技术参数 Main Specifications

适用线规 (Applicable wire gauge): AWG#26~30

接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$







绝缘电阻 (Insulation resistance): $\geq 500\text{M}\Omega$

额定电压 (Rated voltage): 150V AC DC


额定电流 (Rated current): 1.0A AC DC

耐电压 (Withstand Voltage): 500V AC/minute

温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

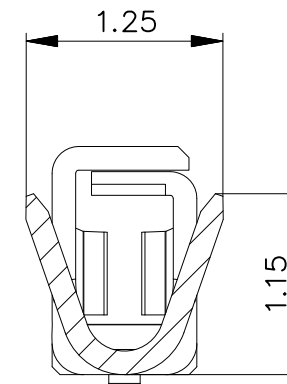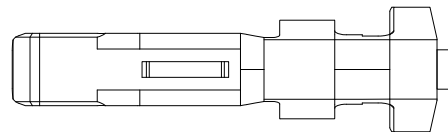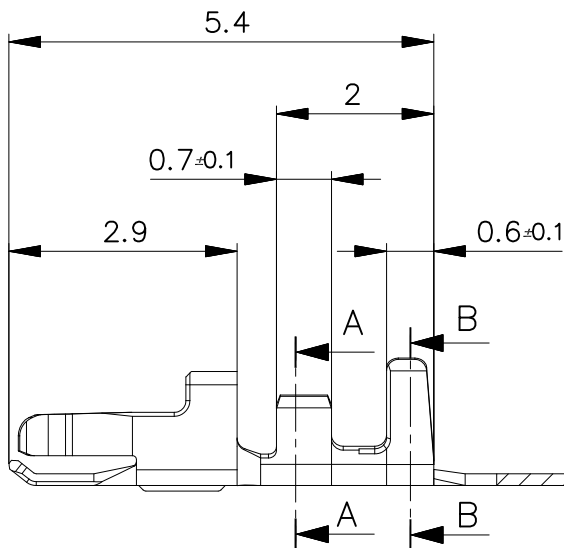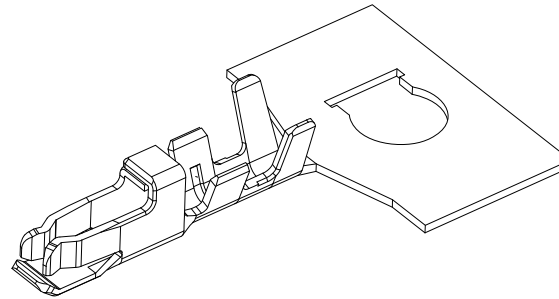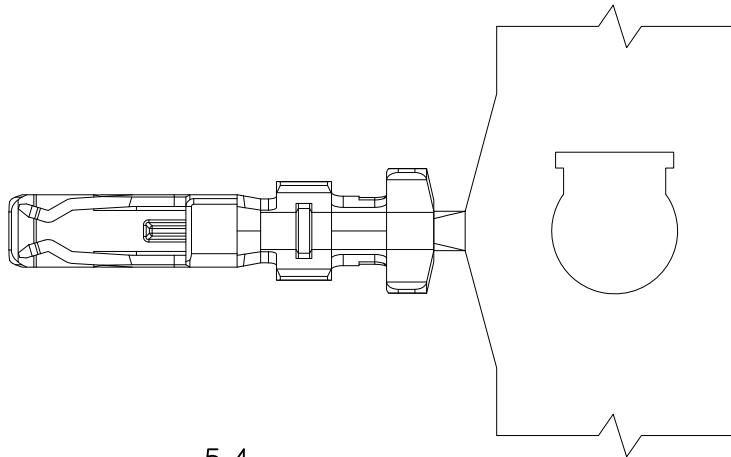

SECTION A-A

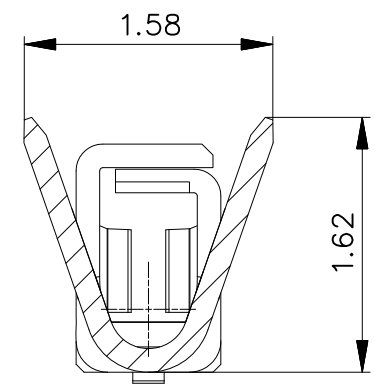

SECTION B-B

Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
AWG#26~30	Φ0.78-1.02mm	COPPER ALLOY	Tin-plated	

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 康 导 新 能 源 网址: www.dgoonne.com 电话: 0768-85337833 邮箱: 2850175886@qq.com 传真: 0768-85392827	PART NO: 21256T		
				LINEAR	ANGLES	APPROVED	黎腾	2017. 06. 16		DWG. NO:		
				0. 0±0. 35	X° REF±6°							
A0	新图面发行	2017. 06. 16	UNIT: MM	0. 00±0. 25	X° ±3°	DESIGNER	肖坤权	2017. 06. 16			TITLE: 1. 25mmPITCH TERMINAL	REV: A0
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000±0. 15	X° X'±2°	DRAWN	旷淇	2017. 06. 16				