
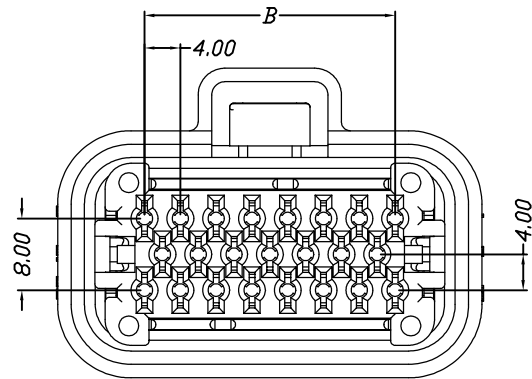
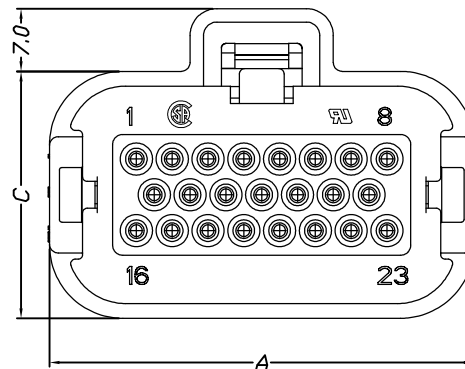


环保物料

Specifications:

Voltage Rating : 600V AC/DC
Current Rating : 8A AC,DC
Withstand Voltage : 1500V AC/minute
Contact Resistance : 10mΩ(MAX.)
Insulation Resistance : 1000V DC/1000MΩ(MIN.)
Temperature Range : -40°C~+105°C

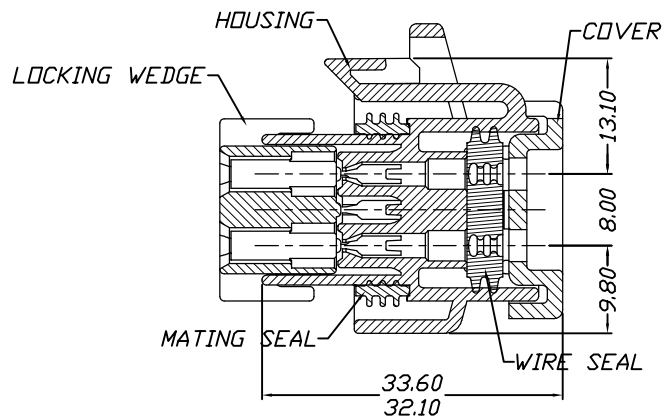

Part No.	A	B	C
8P	27.40	8.00	27.50
14P	35.40	16.00	27.60
23P	47.40	28.00	27.60
35P	63.40	44.00	27.45
Material		Color	
PBT,UL94V-0		Black	

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
				0.0±0.35	X° REF±6°			
				0.00±0.25	X° ±3°			
AO	新图面发行	2018.7.28	UNIT: MM	0.000±0.15	X° X'±2°	APPROVED		
REV.	REVISION RECORD	DATE	SIZE: A4			DESIGNER		
						DRAWN	肖坤权	2018.7.28



TITLE:
4.00mm pitch Housing

PART. NO:		44002H00-NP*-ZH-PT	
DWG. NO:		ENDE05	
REV:	AO	SHEET:	1/1