

环保物料

主要技术参数 Main Specifications

接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$





绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$

额定电压 (Rated voltage): 150V AC DC

额定电流 (Rated current): 3.0A AC DC

耐电压 (Withstand Voltage): 500V AC/minute

温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

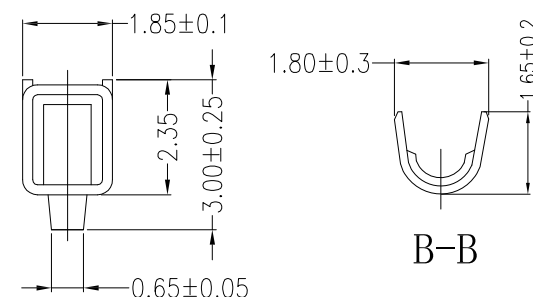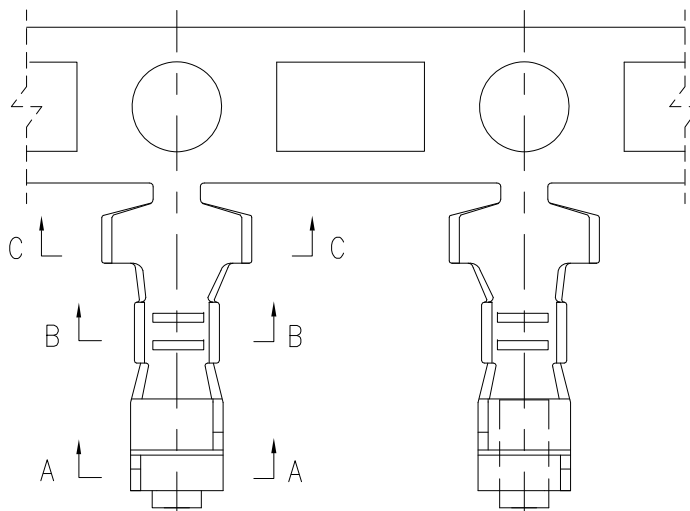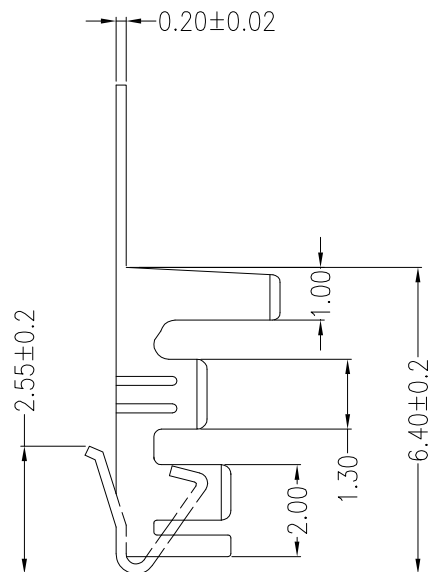

Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
AWG #22~#28	1.90mm (max)	Phosphor bronze	Tin-plated	

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 康 导 新 能 源 网址: www.dgonne.com 电话: 0769-85337633 邮箱: 2850175988@qq.com 传真: 0769-85392827	PART. NO: 22501T	
				LINEAR	ANGLES	APPROVED	黎腾	2017. 06. 16		DWG. NO:	
				0. 0±0. 35	X° REF±6°						
A0	新图面发行	2017. 06. 16	UNIT: MM	0. 00±0. 25	X° ±3°	DESIGNER	肖坤权	2017. 06. 16		TITLE: 2. 50mmPITCH TERMINAL	
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000±0. 15	X° X'±2°	DRAWN	旷淇	2017. 06. 16	REV: A0		