


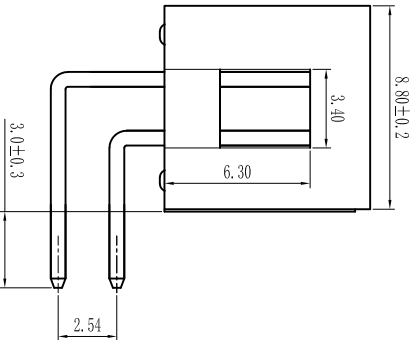
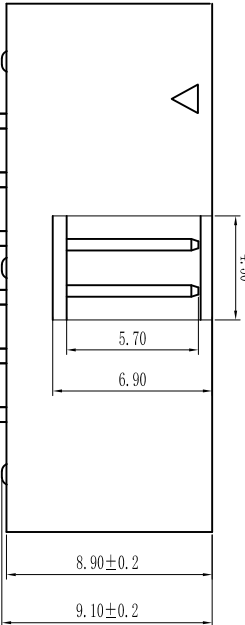


环保物料

A	Pin数	尺寸A	尺寸B	尺寸C
	2×3	5.08	12.94	15.24
	2×4	7.62	15.48	17.78
	2×5	10.16	18.02	20.32
	2×6	12.70	20.56	22.86
	2×7	15.24	23.10	25.40
	2×8	17.78	25.64	27.94
	2×9	20.32	28.18	30.48
	2×10	22.86	30.72	33.02
	2×11	25.40	33.26	35.56
B	2×12	27.94	35.80	38.10
	2×13	30.48	38.34	40.64
	2×14	33.02	40.88	43.18
	2×15	35.56	43.42	45.72
	2×16	38.10	45.96	48.26
	2×17	40.64	48.50	50.80
	2×18	43.18	51.04	53.34
	2×19	45.72	53.58	55.88
	2×20	48.26	56.12	58.42
	2×21	50.80	58.66	60.96
C	2×22	53.34	61.20	63.50
	2×23	55.88	63.74	66.04
	2×24	58.42	66.28	68.58
	2×25	60.96	68.82	71.12
	2×26	63.50	71.36	73.66
	2×27	66.04	73.90	76.20
	2×28	68.58	76.44	78.74
	2×29	71.12	78.98	81.28
	2×30	73.66	81.52	83.82
	2×31	76.20	84.06	86.36
F	2×32	78.74	86.60	88.90

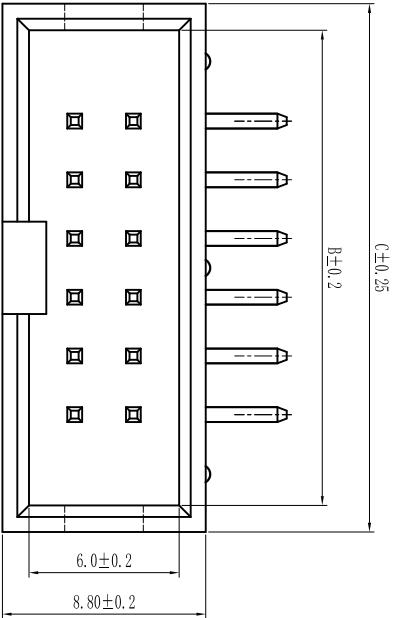

PCB LAYOUT

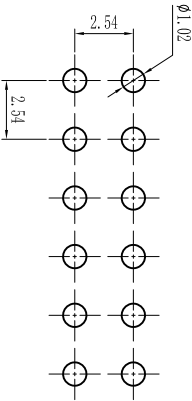

										PART. NO:	
										KDBH-0029	
										DWG. NO:	
										ENDE2029	
										REV: A0	
										SHEET: 1/1	



F	B 25 9B-XXX X X -XX -X -XXX									
	Pitch: 2.54mm									
	Pitch: 2.54mm									
	Pitch: 2.54mm									
	Pitch: 2.54mm									
	Pitch: 2.54mm									
	Pitch: 2.54mm									
	Pitch: 2.54mm									
	Pitch: 2.54mm									
	Pitch: 2.54mm									
E	Pitch: 2.54mm									

D:1.8

Insulator : Polyester (UL94V-0)
Standard:PBT/PA6T/LCP
Contact: Brass
Plating : Au or Sn Over 50u " Ni

Specification:
Current Rating : 3AMP
Temperature Range : -40℃to+105℃
Contact Resistance : 20mΩ Max
Insulation Resistance : 1000MΩ Min
Withstanding Voltage : AC 1000V
Material: