
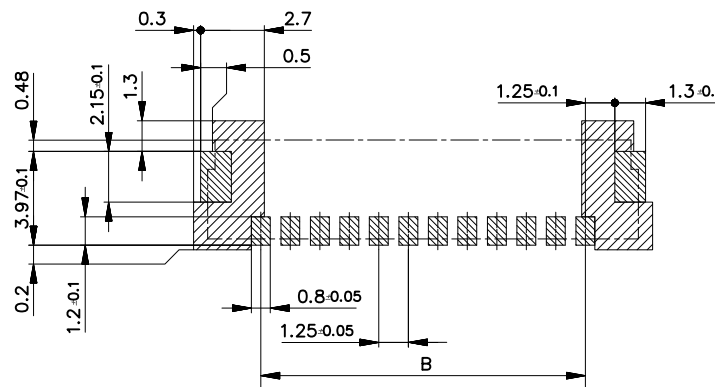
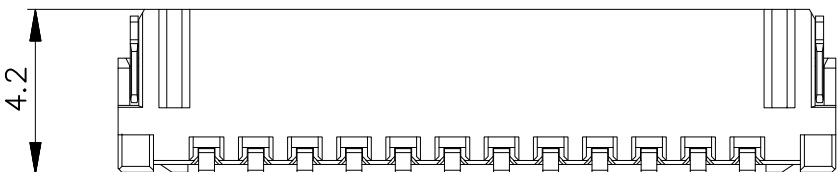
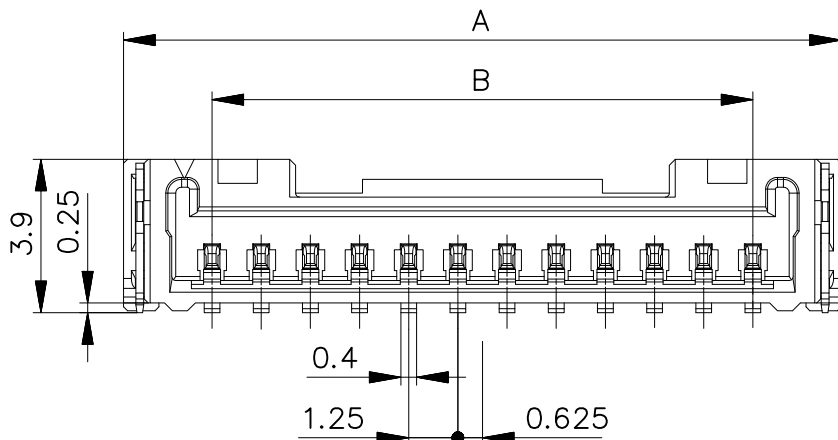


环保物料

主要技术参数 Main Specifications

线 数 (Poles): 02 to 16
接触电阻 (Contact resistance): $\leq 20m\Omega$
绝缘电阻 (Insulation resistance): $\geq 500M\Omega$
额定电压 (Rated voltage): 150V AC DC
额定电流 (Rated current): 1.0A AC DC
耐 电 压 (Withstand Voltage): 500V AC/minute
温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

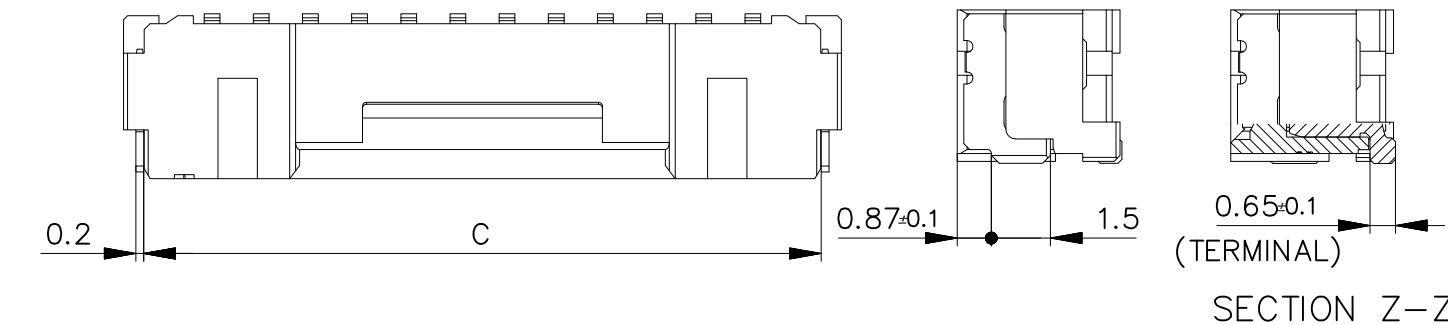

22.20	18.75	23.25	16
20.95	17.50	22.00	15
19.70	16.25	20.75	14
18.45	15.00	19.50	13
17.20	13.75	18.25	12
15.95	12.50	17.00	11
14.70	11.25	15.75	10
13.45	10.00	14.50	9
12.20	8.75	13.25	8
10.95	7.50	12.00	7
9.70	6.25	10.75	6
8.45	5.00	9.50	5
7.20	3.75	8.25	4
5.95	2.50	7.00	3
4.70	1.25	5.75	2
C	B	A	CIRCUIT

NO.	PART	MATERIAL
①	HOUSING	PA, GLASS FILLED, UL94 V-0, COLOR: BEIGE
②	TERMINAL	BRASS MATTE TIN-BISMUTH PLATING
③	NAIL	BRASS MATTE TIN PLATING

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 康 导 新 能 源 网址: www.dgonne.com 电话: 0769-85337633 邮箱: 2850175986@qq.com 传真: 0769-85362627	PART. NO: 21256AWR	
				LINEAR	ANGLES	APPROVED	黎腾	2017. 06. 16		DWG. NO:	
				0. 0±0. 35	X° REF±6°						
A0	新图面发行	2017. 06. 16	UNIT: MM	0. 00±0. 25	X° ±3°	DESIGNER	肖坤权	2017. 06. 16			TITLE: 1. 25mmPITCH 90° WAFER SMT TYPE
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000±0. 15	X° X'±2°	DRAWN	旷淇	2017. 06. 16			
										REV: A0	SHEET: 1/1