

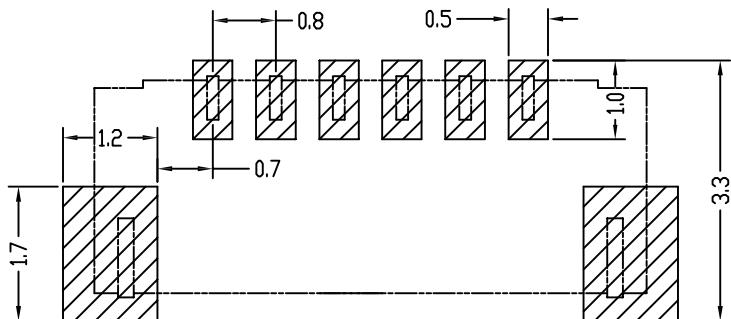
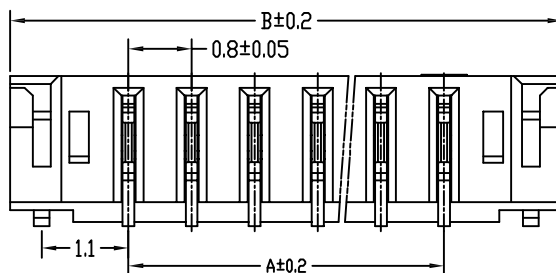
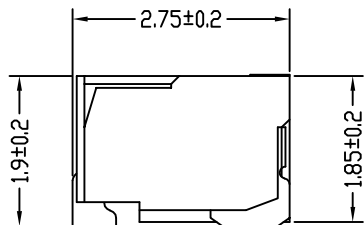



环保物料

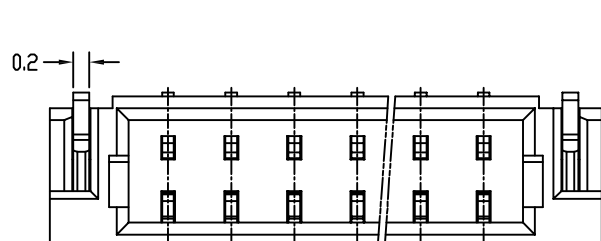

PCB LAYOUT

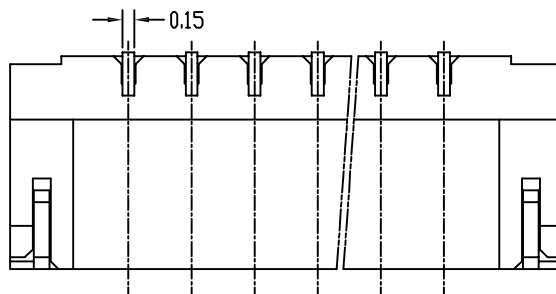

主要技术参数 Main Specifications

线 数 (Poles): 02 to 25
接触电阻 (Contact resistance): $\leq 20m\Omega$
绝缘电阻 (Insulation resistance): $\geq 100M\Omega$
额定电压 (Rated voltage): 30V AC DC
额定电流 (Rated current): 0.5A AC DC
耐 电 压 (Withstand Voltage): 200V AC/minute
温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

15	11.2	14.2			
14	10.4	13.4			
13	9.6	12.6			
12	8.8	11.8			
11	8.0	11.0	25	19.2	22.2
10	7.2	10.2	24	18.4	21.4
9	6.4	9.4	23	17.6	20.6
8	5.6	8.6	22	16.8	19.8
7	4.8	7.8	21	16.0	19.0
6	4.0	7.0	20	15.2	18.2
5	3.2	6.2	19	14.4	17.4
4	2.4	5.4	18	13.6	16.6
3	1.6	4.6	17	12.8	15.8
2	0.8	3.8	16	12.0	15.0
孔位	DIM A	DIM B	孔位	DIM A	DIM B

C	Solder TAB	2 PCS	PhosphorBronze	Motte Sn-plated
B	CONTACT	n PCS	PhosphorBronze	Motte Sn-plated/GOLD
A	HOUSING	1 PCS	LCP	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 康 导 新 能 源 网址: www.dgoonne.com 电话: 0769-85337633 邮箱: 2850175988@qq.com 传真: 0769-85392827	PART. NO: 20810AWR	
				LINEAR	ANGLES	APPROVED	黎腾	2017. 06. 16		DWG. NO:	
				0. 0±0. 35	X° REF±6°	DESIGNER	肖坤权	2017. 06. 16			
AO	新图面发行	2017. 06. 16	UNIT: MM	0. 00±0. 25	X° ±3°			TITLE:			
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000±0. 15	X° X'±2°	DRAWN	旷淇	2017. 06. 16		0. 8mmPITCH 90° WAFER SMT TYPE	REV: A0