

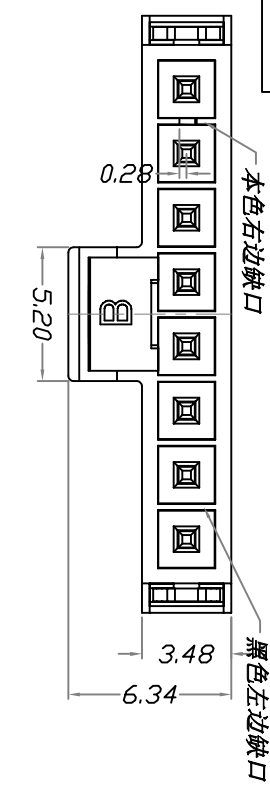

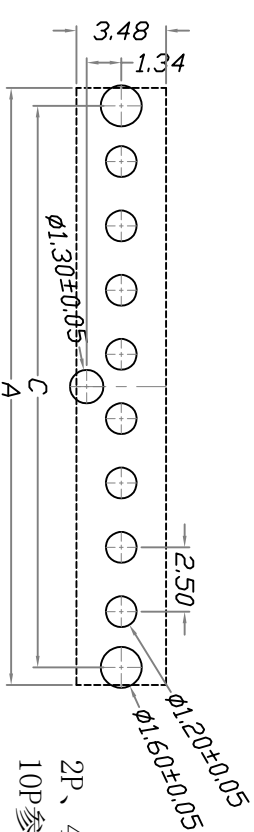


环保物料

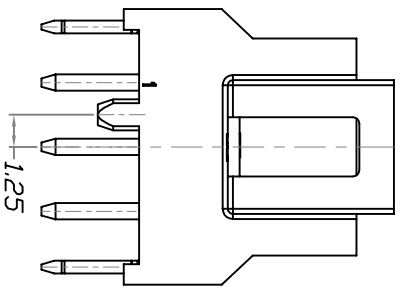

Specifications:
Voltage Rating : 250V AC/DC
Current Rating : 6.5A AC,DC
Withstand Voltage : 1500V AC/minute
Contact Resistance : 10mΩ(MAX.)
Insulation Resistance : 1000MΩ(MIN.)
Temperature Range : -40°C~+105°C

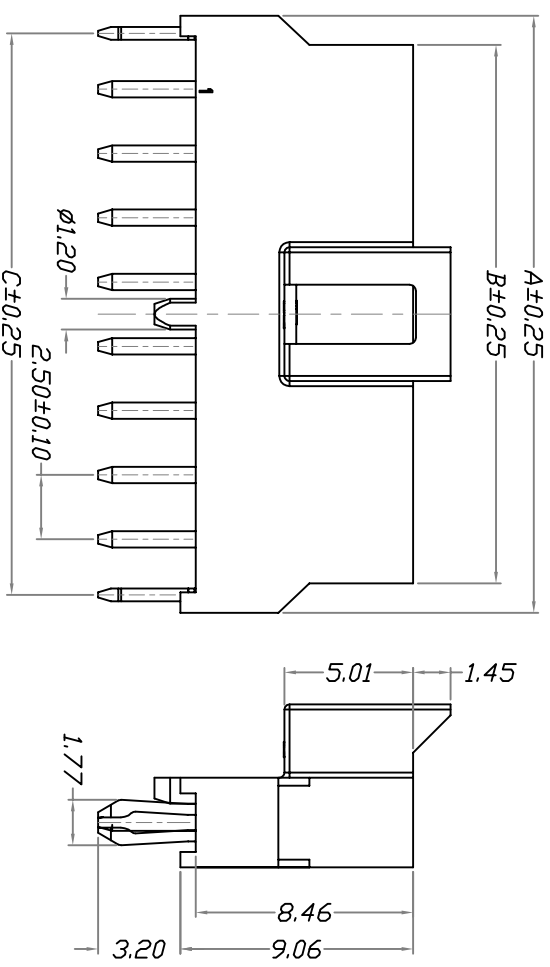

Recommended PCB patternm
THICKNESS=1.6 TO 2.4mm

2P、4P、6P、8P、
10P参考此图

3P、5P、7P参考此图

Poles	Dimensions	
	A	B
2P	5.94	2.50
3P	8.44	5.00
4P	10.94	7.50
5P	13.44	10.00
6P	15.94	12.50
7P	18.44	15.00
8P	20.94	17.50

Material	Color	PIN Material
LCP	Black/NATURAL	Brass

GENERAL TOLERANCES	
LINEAR	ANGLES
0.0±0.25	X° REF±6°

SCALE:	
1:1	
APPROVED	NAME
DESIGNER	DATE

**康 孚 新 能 源**
地址: www.dgpcmc.com 电话: 0769-86337633
邮箱: 2850175900@qq.com 传真: 0769-86302027

PART. NO:
42508WOX-NPX-A1-XX
DWG. NO:

GENERAL TOLERANCES	
LINEAR	ANGLES
0.0±0.25	X° REF±6°
APPROVED	NAME
DESIGNER	DATE
2.50mm Pitch 180° Wafer DIP Type	
REV:	AO
SHEET:	1/1