
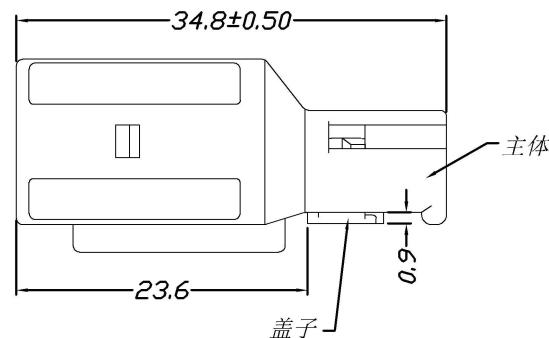
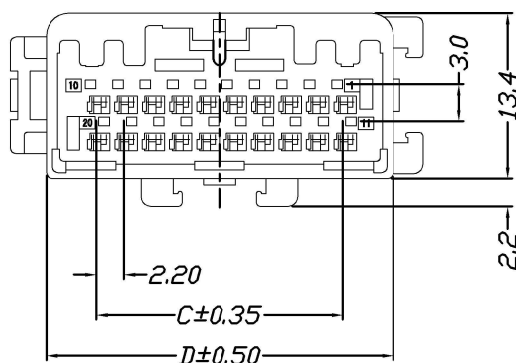


环保物料

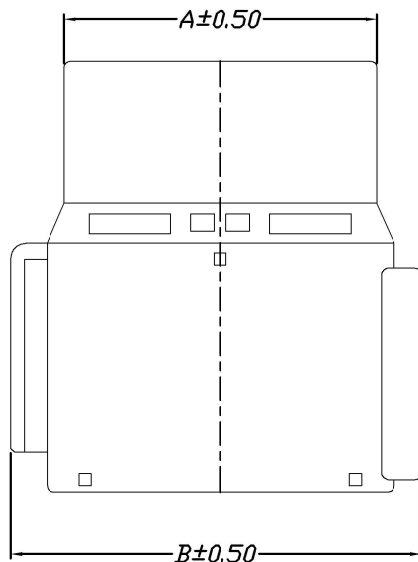

Specifications:
Voltage Rating : 250V AC/DC
Current Rating : 3A AC,DC
Withstand Voltage : 1000V AC/minute
Contact Resistance : 30mΩ(MAX.)
Insulation Resistance : 1000MΩ(MIN.)
Temperature Range : -40°C~+85°C

Part No	Dimensions			
	A	B	C	D
2*6P	16.30	24.20	11.00	19.10
2*8P	20.70	28.60	15.40	23.50
2*10P	25.10	33.00	19.80	27.90
2*12P	29.50	37.40	24.20	32.30
2*14P	33.90	41.80	28.60	36.70
2*16P	38.30	46.20	33.00	41.10
2*18P	42.70	50.60	37.40	45.50
2*20P	47.10	55.00	41.80	49.90

Material	Color
PA66,UL94V-0	Gray

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 康导新能源 网址: www.dgoonne.com 电话: 0769-86337763 邮箱: 285017588@qq.com 传真: 0769-86362282	PART. NO: 32202H00-2*NP*-G2-66	
				LINEAR	ANGLES	APPROVED	黎腾	2017. 06. 16		DWG. NO: ENDE05	
				0. 0±0. 25	X° REF±6°	DESIGNER	肖坤权	2017. 06. 16			
A0	新图面发行	2017. 06. 16		UNIT: MM	0. 00±0. 15	X° ±3°	DRAWN	旷淇			2017. 06. 16
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000±0. 08	X° X'±2°	TITLE: 2. 20mm pitch Dual Housing				REV: A0	SHEET: 1/1