


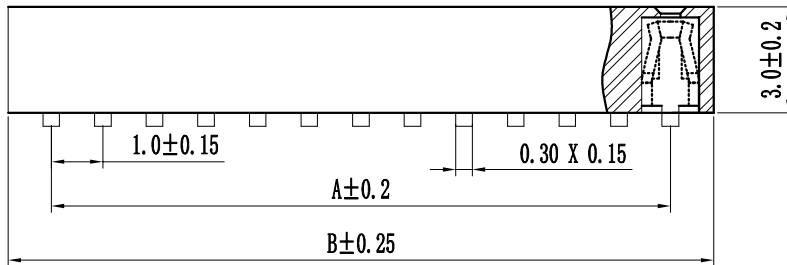



环保物料

Pin数	尺寸A	尺寸B
1X2	1.00	2.40
1X3	2.00	3.40
1X4	3.00	4.40
1X5	4.00	5.40
1X6	5.00	6.40
1X7	6.00	7.40
1X8	7.00	8.40
1X9	8.00	9.40
1X10	9.00	10.40
1X11	10.00	11.40
1X12	11.00	12.40
1X13	12.00	13.40
1X14	13.00	14.40
1X15	14.00	15.40
1X16	15.00	16.40
1X17	16.00	17.40
1X18	17.00	18.40
1X19	18.00	19.40
1X20	19.00	20.40
1X21	20.00	21.40
1X22	21.00	22.40
1X23	22.00	23.40
1X24	23.00	24.40
1X25	24.00	25.40
1X26	25.00	26.40
1X27	26.00	27.40
1X28	27.00	28.40
1X29	28.00	29.40
1X30	29.00	30.40
1X31	30.00	31.40
1X32	31.00	32.40
1X33	32.00	33.40
1X34	33.00	34.40
1X35	34.00	35.40
1X36	35.00	36.40
1X37	36.00	37.40
1X38	37.00	38.40
1X39	38.00	39.40
1X40	39.00	40.40
1X41	40.00	41.40
1X42	41.00	42.40
1X43	42.00	43.40
1X44	43.00	44.40
1X45	44.00	45.40
1X46	45.00	46.40
1X47	46.00	47.40
1X48	47.00	48.40
1X49	48.00	49.40
1X50	49.00	50.40



PCB LAYOUT

Specification:

Current Rating : 1AMP

Temperature Range : -40°Cto+105°C

Contact Resistance : 20mΩ Max

Insulation Resistance : 1000MΩ Min

Withstanding Voltage : AC 500V

Material:

Insulator : Polyester (UL94V-0)

Standard:PA6T/LCP

Contact: Bronze

Plating : Au or Sn Over 50u" Ni

F 10 9S-XXX X X -XX-X-XXX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① Series No:	② Pitch:	③ Tail/Mounting Style:	④ No. of Pins:	⑤ Insulator Color:
P=Pin Header	08-0.80	9D-Right Angle DIP Type	Single Row Double Row	A:Black B:Brown C:Red
F=Female Header	10=1.00	9S-Straight SMT Type	101=1*1Pin 201=2*1Pin	D:Orange E:Yellow F:Green
B=Box Header	12=1.27	0D-Straight DIP Type	102=1*2Pin 202=2*2Pin	G:Blue H:Violet J:Gray
E=Ejector Header	20=2.00	0S-Horizontal SMT Type	i i i i	K:White P:Light Blue
	25=2.54		140=1*40pin 240=2*40pin	
	39=3.96			
	50=5.08			

⑥ Material Type:	⑦ Plating Type:	⑧ RoHS Request:	⑨ Customer Code
A-PBT	0*-Sn-Au 1*-Ni 2*-Sn 3*-Matte-Tin 5*-Au	0:No Request	
B-PA46	0A-Sn-Au 1u" 0F-Sn-Au 10u" 5A-Au 1u"	1:RoHS	
C-PA6T	0B-Sn-Au 2u" 0G-Sn-Au 15u" 5B-Au 2u"	2:HF (Halogen Free)	
D-PA9T	0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u"		
E-LCP	0D-Sn-Au 4u" 0I-Sn-Au 40u" i		
	0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u"		

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
				0.00±0.15	X° REF±6°	APPROVED	黎腾	2017.06.16
				0.00±0.15	X° ±3°	DESIGNER	肖坤权	2017.06.16
				0.000±0.08	X° X'±2°	DRAWN	旷淇	2017.06.16

康导新能源
 网址: www.dgconne.com 电话: 0760-8537633
 邮箱: 2850175986@qq.com 传真: 0760-85392827

PART. NO:	KDFH-0013
DWG. NO:	ENDE1013
REV:	AO
SHEET:	1/1